

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 914LED12

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	100 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	1,2	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	72
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,441 0,416
Parameters for directional light sources:				
Peak luminous intensity (cd)	591		Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0		Survival factor	0,50
the lumen maintenance factor	0,93			

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

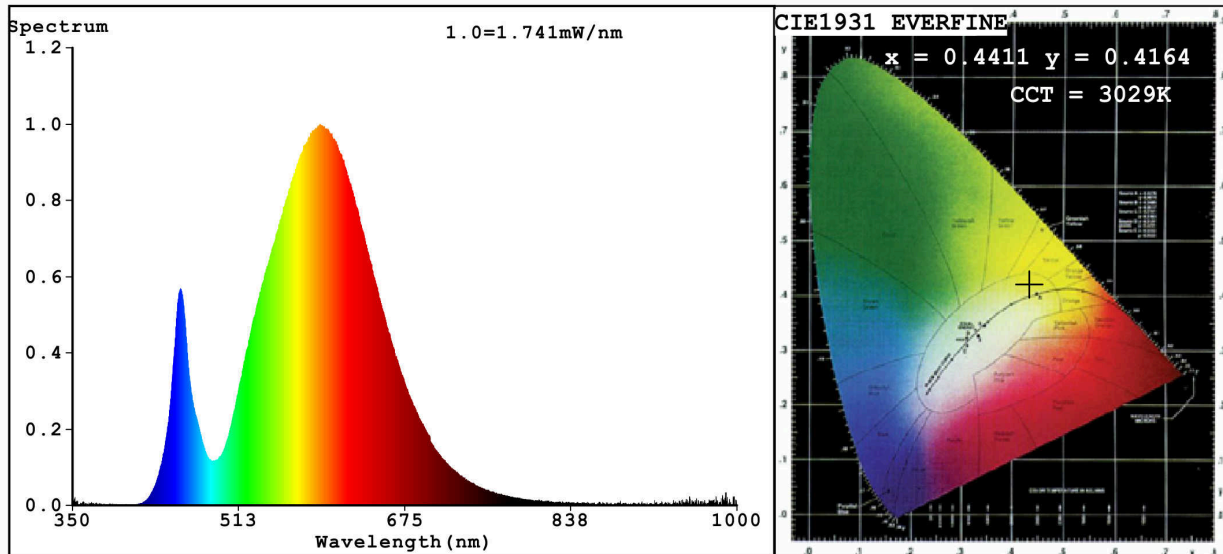

Color Parameters:

Chromaticity Coordinate: $x=0.4411$ $y=0.4164$ $u'=0.2480$ $v'=0.5268$
 CCT=3029K (Duv=0.0043) Dominant WL: $\lambda_d = 581.3\text{nm}$ Purity=57.4%
 Ratio: R=20.9% G=77.3% B=1.8%; Peak WL: $\lambda_p = 591.8\text{nm}$ FWHM=126.7nm
 Render Index: Ra=72.2
 R1 =68 R2 =81 R3 =92 R4 =67 R5 =66 R6 =72 R7 =82
 R8 =49 R9 =0 R10=55 R11=58 R12=39 R13=71 R14=95 R15=63

Photo Parameters:

Flux = 88.15 lm Eff. : 75.54 lm/W Fe = 257.7 mW

Electrical parameters:

V = 12.080 V I = 0.09660 A P = 1.167 W PF = 1.000

WHITE: ANSI_3000K

Status: Integral T = 250 ms Ip = 34875 (53%)

Model: CAB-14_2,4W
 Tester: Petya Marinova
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 914LED12
 Date: 2015-04-15 08:23
 Humidity: 65.0%
 Remarks: PO001901