

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 92914WH/G

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	230 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 300
On-mode power (P_{on}), expressed in W	3,9	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	70
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,357 0,351	
Parameters for directional light sources:				
Peak luminous intensity (cd)	445	Beam angle in degrees, or the range of beam angles that can be set	60	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

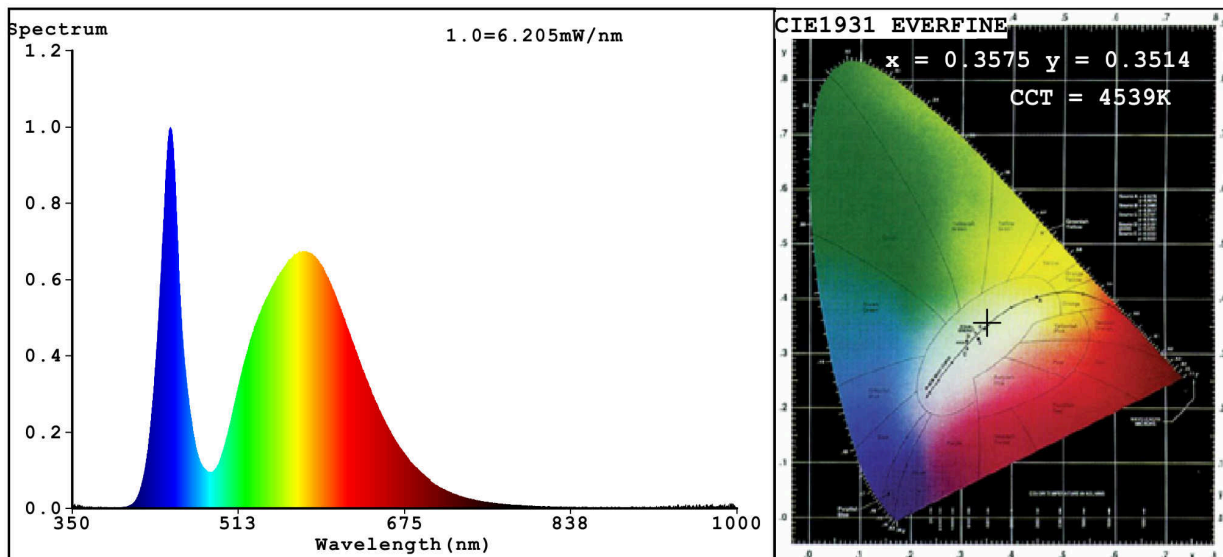

Color Parameters:

Chromaticity Coordinate: $x=0.3575$ $y=0.3514$ $u'=0.2200$ $v'=0.4864$
 $CCT=4539K$ ($Duv=-0.0049$) Dominant WL: $L_d = 581.7nm$ Purity=12.7%
 Ratio: $R=15.5\%$ $G=81.8\%$ $B=2.7\%$; Peak WL: $L_p=445.9nm$ FWHM=22.2nm
 Render Index: $R_a=70.8$
 $R1 = 69$ $R2 = 77$ $R3 = 80$ $R4 = 70$ $R5 = 69$ $R6 = 66$ $R7 = 79$
 $R8 = 56$ $R9 = 0$ $R10=43$ $R11=65$ $R12=41$ $R13=70$ $R14=89$ $R15=65$

Photo Parameters:

Flux = 235.0 lm Eff. : 59.84 lm/W Fe = 713.4 mW

Electrical parameters:

V = 220.13 V I = 0.03374 A P = 3.928 W PF = 0.5288

WHITE: ANSI_4500K

Status: Integral T = 80 ms Ip = 31343 (48%)

Model: SA-914/3W
 Tester: Petya Marinova
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 92914WH/G
 Date: 2015-07-21 13:05
 Humidity: 65.0%
 Remarks: