

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 92DL1240/WH

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	550 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	12,6	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,381 0,377
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	443		Beam angle in degrees, or the range of beam angles that can be set	60
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	12		Survival factor	0,50
the lumen maintenance factor	0,93			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi$ 1)	0,50		Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)		If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0		Stroboscopic effect metric (SVM)	0,0

(a) : not applicable;

(b) : not applicable;

**Spectrum Test Report**

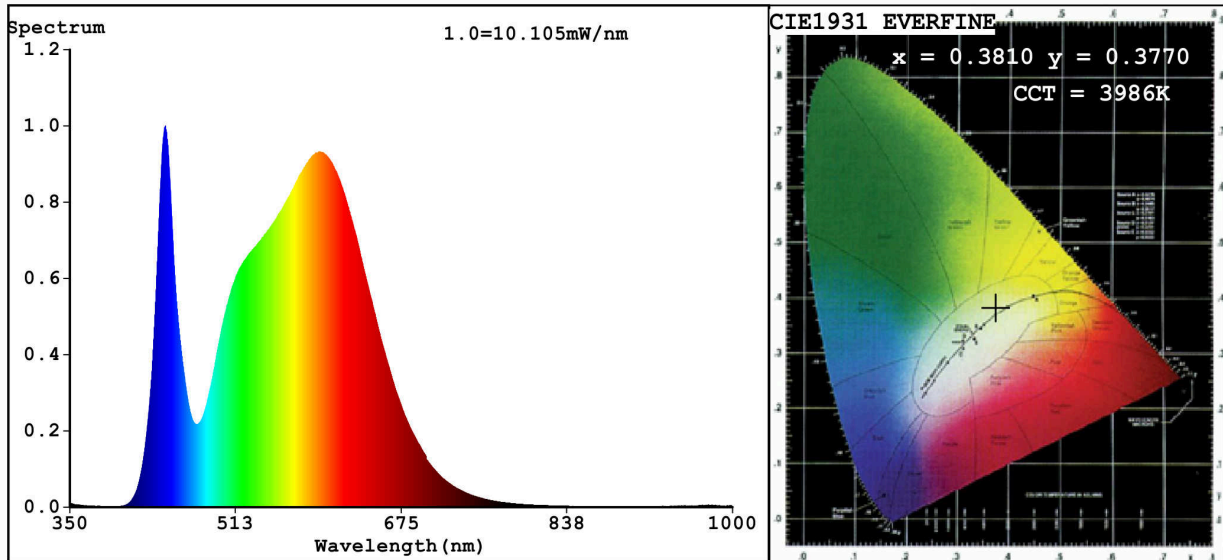

**Color Parameters:**

Chromaticity Coordinate:  $x=0.3810$   $y=0.3770$  /  $u'=0.2254$   $v'=0.5018$

CCT=3986K (Duv=-0.0001) Dominant WL:  $\lambda_d = 579.2\text{nm}$  Purity=27.5%

Ratio: R=18.4% G=78.2% B=3.3%; Peak WL:  $\lambda_p = 443.8\text{nm}$  FWHM=22.6nm

Render Index: Ra=83.3

R1 =82	R2 =87	R3 =93	R4 =84	R5 =83	R6 =84	R7 =86	
R8 =67	R9 =12	R10=71	R11=85	R12=70	R13=83	R14=96	R15=76

**Photo Parameters:**

Flux = 545.6 lm Eff. : 43.30 lm/W  $\eta_e = 1.686$  W

**Electrical parameters:**

V = 229.89 V I = 0.1147 A P = 12.60 W PF = 0.4780

WHITE: ANSI\_4000K

Status: Integral T = 67 ms  $I_p = 40166$  (61%)

Model: LED DOWNLIGHT ROUND/12W  
Tester: Petya Marinova  
Temperature: 25.3Deg  
Manufacturer: ELMARK

Number: 92DL1240/WH  
Date: 2018-11-13 12:59  
Humidity: 65.0%  
Remarks: VSUN20180706\_5168