

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 92DL82F6030/BL

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	60	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 200 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	65,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	325	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	176	
	Depth	138	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,424 0,397
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	600	Beam angle in degrees, or the range of beam angles that can be set	24
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	2	Survival factor	0,50
the lumen maintenance factor	0,95		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

**Spectrum Test Report**

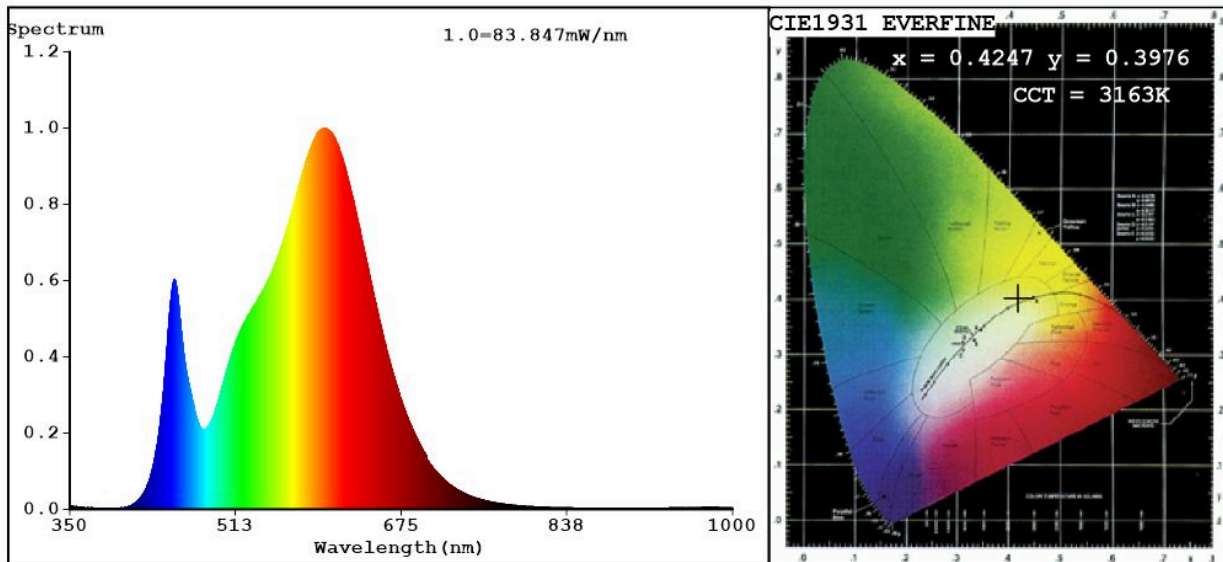

**Color Parameters:**

Chromaticity Coordinate:  $x=0.4247$   $y=0.3976/u'=0.2454$   $v'=0.5170$   
 CCT=3163K (Duv=-0.0008) Dominant WL:Ld =582.5nm WL:Lc = --nm Purity=46.8%  
 Ratio:R=21.8% G=75.5% B=2.8%; Peak WL:Lp=600.5nm FWHM=130.2nm  
 Render Index:Ra=81.5

R1 =80    R2 =90    R3 =96    R4 =79    R5 =80    R6 =88    R7 =82  
 R8 =57    R9 =2    R10=78    R11=78    R12=69    R13=82    R14=98    R15=72

**Photo Parameters:**

Flux = 4191 lm    Eff. : 65.92 lm/W    Fe = 12.66 W

**Electrical parameters:**

V = 229.71 V    I = 0.2816 A    P = 63.58 W PF = 0.9827  
 WHITE:ANSI\_3000K

Status: Integral T = 10 ms    Ip = 41884 (64%)

Model:LED DOWNLIGHT FIXTURES  
 Tester:Atanas DAKOV  
 Temperature:25.3Deg  
 Manufacturer:ELMARK

Number:92DL82F6030 BL  
 Date:2023-01-12 11:14:07  
 Humidity:65.0%  
 Remarks:8840