

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 92DL82F6040/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	60	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 200 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	59,9	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	325	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	176	
	Depth	138	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,369 0,372
Parameters for directional light sources:			
Peak luminous intensity (cd)	456	Beam angle in degrees, or the range of beam angles that can be set	24
Parameters for LED and OLED light sources:			
R9 colour rendering index value	2	Survival factor	0,50
the lumen maintenance factor	0,95		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

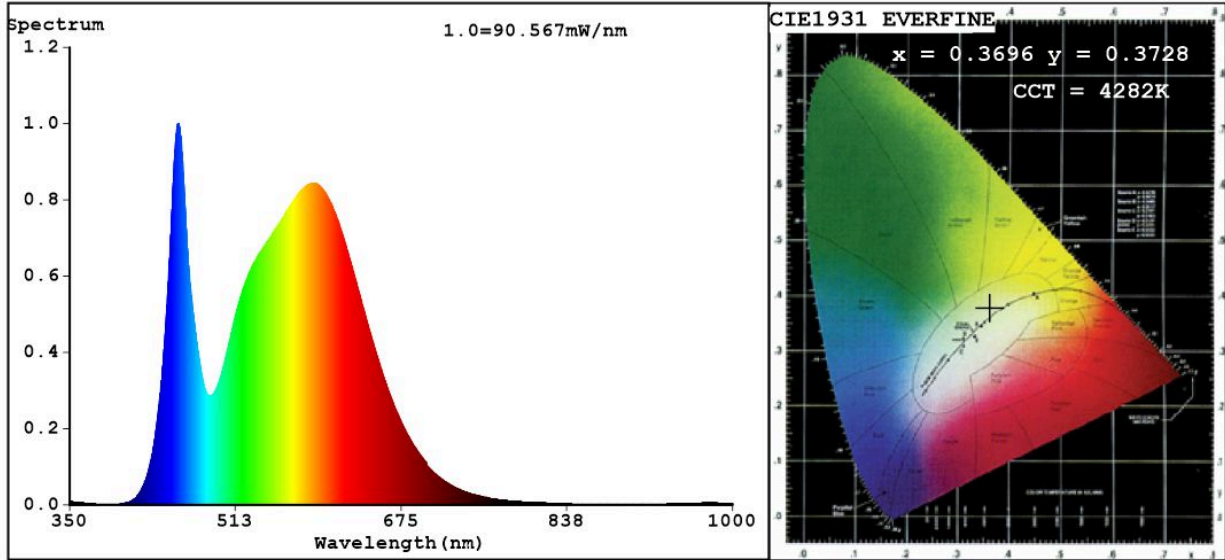

Color Parameters:

Chromaticity Coordinate: $x=0.3696$ $y=0.3728$ / $u'=0.2195$ $v'=0.4982$
 CCT=4282K(Duv=0.0015) Dominant WL:Ld =577.0nm WL:Lc = --nm Purity=22.8%
 Ratio:R=17.1% G=78.9% B=4.0%; Peak WL:Lp=456.7nm FWHM=26.3nm
 Render Index:Ra=81.2

R1 =79 R2 =89 R3 =95 R4 =77 R5 =78 R6 =83 R7 =85
 R8 =62 R9 =2 R10=73 R11=74 R12=55 R13=82 R14=97 R15=73

Photo Parameters:

Flux = 4485 lm Eff. : 74.77 lm/W Fe = 13.66 W

Electrical parameters:

V = 229.62 V I = 0.2662 A P = 59.99 W PF = 0.9815

WHITE:ANSI_4500K

Status: Integral T = 10 ms Ip = 40899 (62%)

Model:LED DOWNLIGHT FIXTURES
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:92DL82F6040 WH
 Date:2023-01-12 11:06:19
 Humidity:65.0%
 Remarks:8840