

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 92DL84TS1240/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	840 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	12,1	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,374 0,376	
Parameters for directional light sources:				
Peak luminous intensity (cd)	456	Beam angle in degrees, or the range of beam angles that can be set	24	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	4	Survival factor	0,50	
the lumen maintenance factor	0,95			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

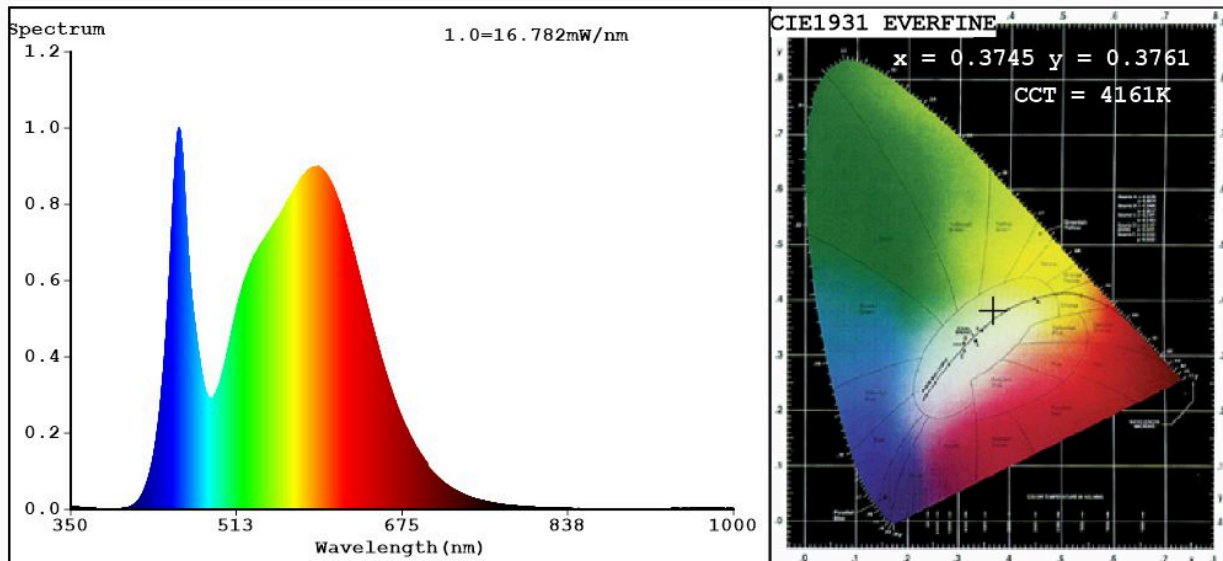

Color Parameters:

Chromaticity Coordinate: $x=0.3745$ $y=0.3761$ $u'=0.2215$ $v'=0.5004$
 CCT=4161K (Duv=0.0015) Dominant WL: $L_d = 577.6\text{nm}$ WL: $L_c = \text{--nm}$ Purity=25.2%
 Ratio: R=17.5% G=78.6% B=3.9% Peak WL: $L_p = 456.0\text{nm}$ FWHM=26.8nm
 Render Index: $R_a = 81.5$

R1 =80	R2 =89	R3 =95	R4 =78	R5 =79	R6 =84	R7 =85
R8 =63	R9 =4	R10=73	R11=75	R12=56	R13=82	R14=97
						R15=74

Photo Parameters:

Flux = 880.5 lm Eff. : 72.47 lm/W Fe = 2.675 W

Electrical parameters:

V = 229.73 V I = 0.09742 A P = 12.15 W PF = 0.5428

WHITE: ANSI_4000K

Status: Integral T = 58 ms Ip = 44586 (68%)

Model: LED DOWNLIGHT FIXTURES
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 92DL84TS1240 WH
 Date: 2023-01-09 13:23:32
 Humidity: 65.0%
 Remarks: 8840