

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 92EL141040/WHBK

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	900 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	10,9	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	135	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	35	
	Depth	66	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,375 0,372
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	3 161	Beam angle in degrees, or the range of beam angles that can be set	30
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	0	Survival factor	0,50
the lumen maintenance factor	0,95		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

# Spectrum Test Report


## Product Information

Product Category: COB线条灯  
Product Number: 2  
Buyer: BARON

Product Type: BL014-10W 4000K  
Submitted Unit: WH

## CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.3751$   $y=0.3724$   $u(u')=0.2233$   $v=0.3326$   $v'=0.4988$   
CCT:  $T_c=4118K$  ( $duv=-0.00047$ ) Color Ratio:  $R=0.177$   $G=0.785$   $B=0.038$   
Peak Wavelength: 450nm Half Bandwidth: 25.4nm  
Dominant Wavelength: 579.9nm Color Purity: 0.243  
CRI:  $R_i$ :  $R_a=81.8$   
 $R1=80$   $R2=89$   $R3=95$   $R4=81$   $R5=81$   $R6=85$   $R7=84$   $R8=61$   
 $R9=0$   $R10=73$   $R11=79$   $R12=64$   $R13=82$   $R14=97$   $R15=73$

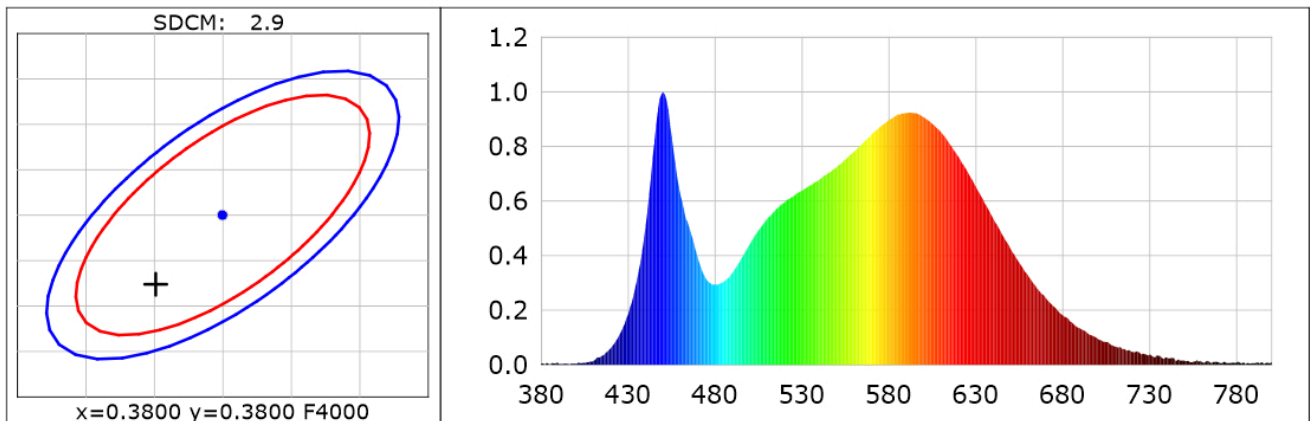

## Photometric Parameters

Luminous Flux: 962.9 lm

Efficiency: 88.34 lm/W

Radiant Power: 2.901 W

## Electric Parameters

Voltage: 227.60V

Current: 0.0920A

Power: 10.90W

Power Factor: 0.5160

Frequency: 49.96Hz

### Test Information

Scan Range: 380nm~800nm:1nm  
Stabilization Time: 0 ms  
Max of Signal: 54546 (3688)

Photometric Method:  
Photometric Condition: Sphere diameter: 1.50m, 4 $\pi$   
CCD Integration Time: 1011.80 ms

Condition:  $T_x=29.8^\circ C$ ,  $T_i=30.6^\circ C$   
Test Lab:  
Operator:

Test Device: Inventfine CMS-2S (Plus)  
Test Time: 2022-07-22 18:54:34  
Inspector: