

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 92EL3LED

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	228 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 000
On-mode power (P_{on}), expressed in W	5,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,05	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	69
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,319 0,329
Parameters for directional light sources:				
Peak luminous intensity (cd)	445		Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0		Survival factor	0,90
the lumen maintenance factor	1,00			

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

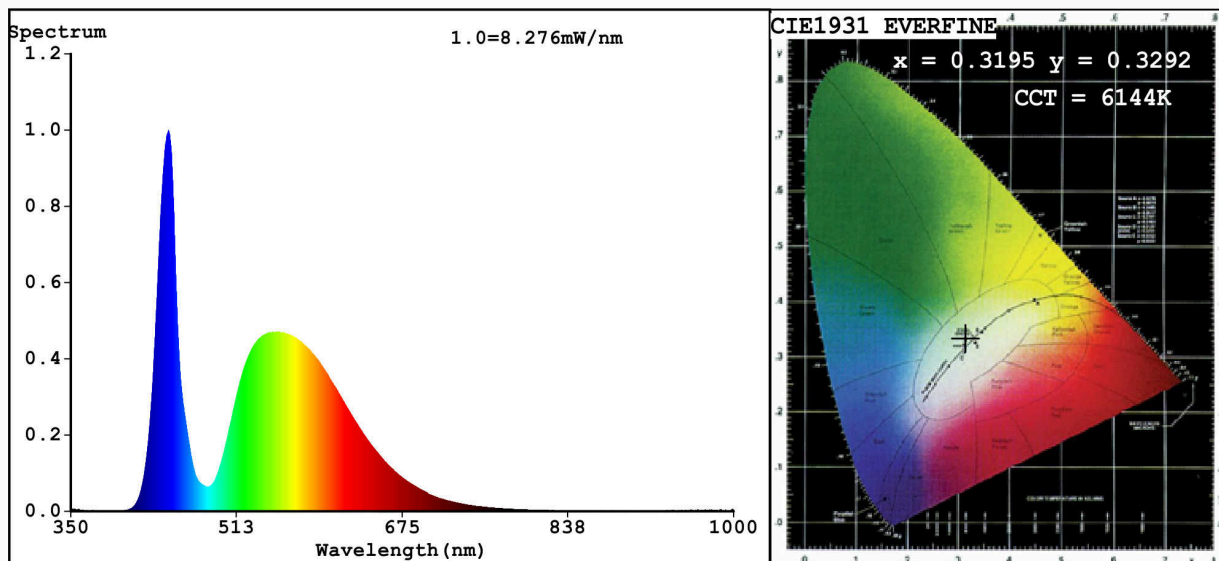

Color Parameters:

Chromaticity Coordinate: $x=0.3195$ $y=0.3292$ $u'=0.2025$ $v'=0.4694$
CCT=6144K (Duv=-0.0001) Dominant WL: $\lambda_d=487.8\text{nm}$ WL: $\lambda_c = \text{--nm}$ Purity=5.0%
Ratio: R=12.7% G=84.2% B=3.1% Peak WL: $\lambda_p=445.8\text{nm}$ FWHM=21.0nm
Render Index: Ra=69.8 AvgR=61.3 TM30: Rf=70 Rg=94 Lav=545.3nm

R1 =70	R2 =72	R3 =71	R4 =72	R5 =71	R6 =63	R7 =77
R8 =62	R9 =0	R10=32	R11=72	R12=40	R13=69	R14=83 R15=66

Photo Parameters:

Flux = 228.9 lm Eff. : 0.00 lm/W Fe = 720.4 mW

Electrical parameters:

V = 219.98 V I = 0 A P = 0 W PF = 0
WHITE: ANSI_6500K

Status: Integral T = 137 ms Ip = 45267 (69%)

Model: EMERGENCY KIT
Tester: Atanas DAKOV
Temperature: 25.3Deg
Manufacturer: ELMARK

Number: 92EL3LED
Date: 2021-06-09 08:43:20
Humidity: 65.0%
Remarks: