

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 92EL62282030/WH

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	20	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 800 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	20,1	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, lighting control	Height	88	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	160	
	Depth	88	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,384 0,383
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	1 251	Beam angle in degrees, or the range of beam angles that can be set	75
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	8	Survival factor	0,50
the lumen maintenance factor	0,95		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,80	Colour consistency in McAdam ellipses	1
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

# Spectrum Test Report

## Product Information

Product Category: SMD 筒灯  
Product Spec: 160\*88mm  
Submitted Unit: WH


Product Type: BR6228-20W  
Product Number: 754  
Buyer: BARON

## CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.3841$   $y=0.3835$   $u(u')=0.2248$   $v=0.3367$   $v'=0.5051$   
CCT:  $T_c=3953K$  ( $duv=0.00207$ ) Color Ratio:  $R=0.184$   $G=0.780$   $B=0.036$   
Peak Wavelength: 449nm Half Bandwidth: 22.1nm  
Dominant Wavelength: 579.2nm Color Purity: 0.304

CRI:  $R_i$ :  $R_a=83.4$

R1 =81	R2 =89	R3 =95	R4 =83	R5 =82	R6 =86	R7 =86	R8 =65
R9 =8	R10=75	R11=82	R12=64	R13=83	R14=98	R15=75	

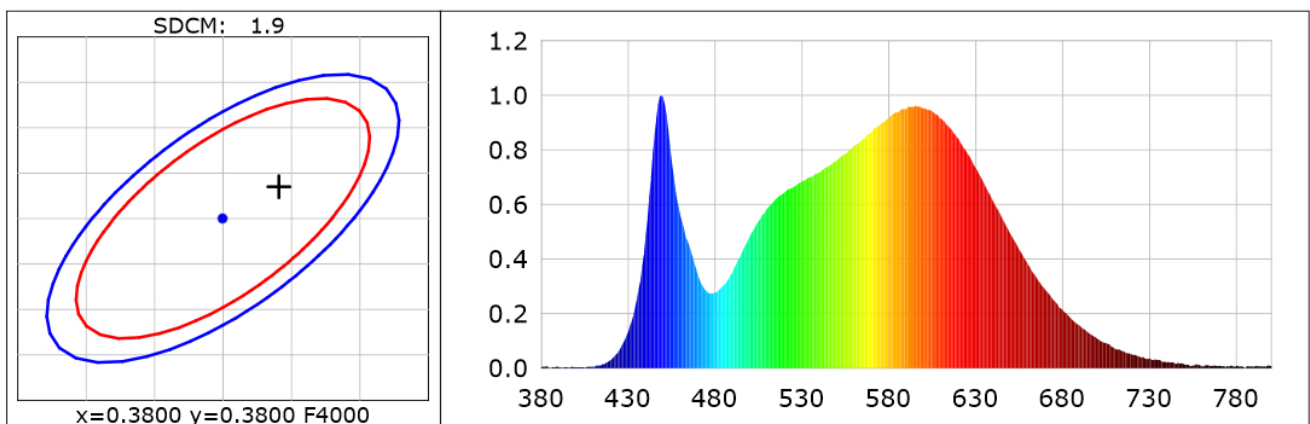

## Photometric Parameters

Luminous Flux: 1789.6 lm

Efficiency: 89.04 lm/W

Radiant Power: 5.345 W

## Electric Parameters

Voltage: 231.30V

Current: 0.1010A

Power: 20.10W

Power Factor: 0.8570

Frequency: 49.96Hz

## Test Information

Scan Range: 380nm~800nm:1nm  
Stabilization Time: 0 ms  
Max of Signal: 46084 (3178)

Photometric Method:  
Photometric Condition: Sphere diameter: 1.50m, 4T  
CCD Integration Time: 489.25 ms

Condition: Tx:28.4'C, Ti:28.8'C  
Test Lab:  
Operator:

Test Device: Inventfine CMS-2S (Plus)  
Test Time: 2022-07-02 11:06:20  
Inspector: