

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 92EL64531240/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	800 in Nar-row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	12,1	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,20
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,376 0,375	
Parameters for directional light sources:				
Peak luminous intensity (cd)	2 382	Beam angle in degrees, or the range of beam angles that can be set	30	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	8	Survival factor	0,50	
the lumen maintenance factor	0,95			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	3	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,2	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

Product Information

Product Category: COB 筒灯
Product Number: 38
Buyer: BARON


Product Type: BR6453-12W 4000K
Submitted Unit: WH

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3768$ $y=0.3750$ $u(u')=0.2234$ $v=0.3335$ $v'=0.5003$
CCT: $T_c=4088K$ ($duv=0.00025$) Color Ratio: $R=0.181$ $G=0.783$ $B=0.036$
Peak Wavelength: 448nm Half Bandwidth: 22.0nm
Dominant Wavelength: 579.6nm Color Purity: 0.256

CRI: R_i : $R_a=83.3$

$R_1=82$	$R_2=88$	$R_3=94$	$R_4=84$	$R_5=82$	$R_6=85$	$R_7=86$	$R_8=65$
$R_9=8$	$R_{10}=73$	$R_{11}=84$	$R_{12}=66$	$R_{13}=83$	$R_{14}=97$	$R_{15}=75$	

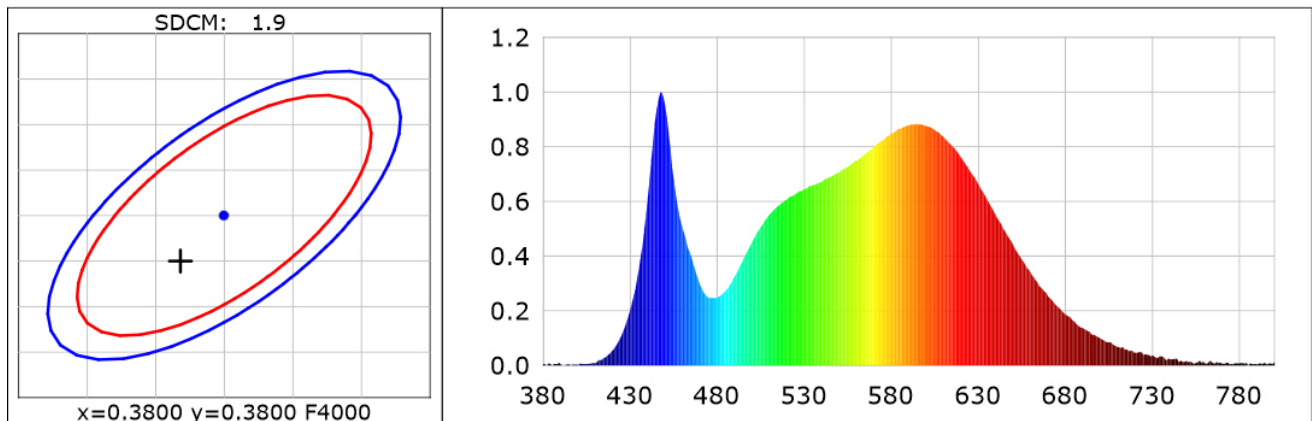

Photometric Parameters

Luminous Flux: 835.8 lm

Efficiency: 69.07 lm/W

Radiant Power: 2.527 W

Electric Parameters

Voltage: 229.80V

Current: 0.0650A

Power: 12.10W

Power Factor: 0.8100

Frequency: 50.02Hz

Test Information

Scan Range: 380nm~800nm:1nm
Stabilization Time: 0 ms
Max of Signal: 53072 (3820)

Photometric Method:
Photometric Condition: Sphere diameter: 1.50m, 4 π
CCD Integration Time: 1137.45 ms

Condition: $T_x:30.4^{\circ}C$, $T_i:31.3^{\circ}C$
Test Lab:
Operator:

Test Device: Inventfine CMS-2S (Plus)
Test Time: 2022-07-27 15:24:42
Inspector: