

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 92EL64532030/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	20	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 400 in Nar-row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	20,6	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,20
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,438 0,406	
Parameters for directional light sources:				
Peak luminous intensity (cd)	3 363	Beam angle in degrees, or the range of beam angles that can be set	35	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,50	
the lumen maintenance factor	0,95			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	4	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,2	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report


Product Information

Product Category: COB 筒灯
Product Number: 45
Buyer: BARON

Product Type: BR6453-20W 3000K
Submitted Unit: WH

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4388$ $y=0.4064$ $u(u')=0.2508$ $v=0.3484$ $v'=0.5226$
CCT: $T_c=2987K$ ($duv=0.00066$) Color Ratio: $R=0.228$ $G=0.749$ $B=0.023$
Peak Wavelength: 605nm Half Bandwidth: 124.2nm
Dominant Wavelength: 583.6nm Color Purity: 0.537
CRI: R_i : $R_a=81.4$
 $R1=79$ $R2=89$ $R3=97$ $R4=81$ $R5=80$ $R6=88$ $R7=81$ $R8=56$
 $R9=0$ $R10=76$ $R11=81$ $R12=72$ $R13=81$ $R14=99$ $R15=71$

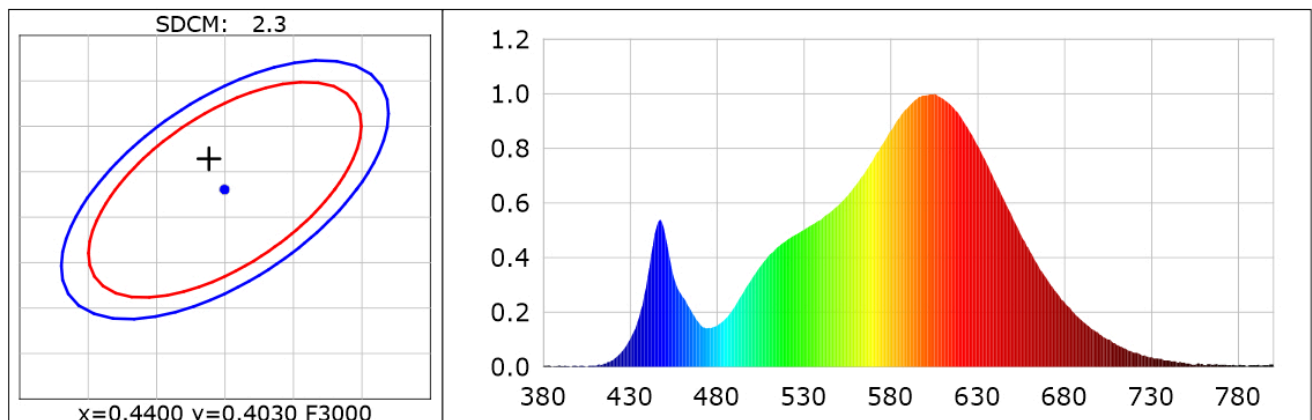

Photometric Parameters

Luminous Flux: 1469.1 lm Efficiency: 71.31 lm/W Radiant Power: 4.328 W

Electric Parameters

Voltage: 227.60V Current: 0.1070A Power: 20.60W
Power Factor: 0.8450 Frequency: 49.97Hz

Test Information

Scan Range: 380nm~800nm:1nm
Stabilization Time: 0 ms
Max of Signal: 45458 (3518)

Photometric Method:
Photometric Condition: Sphere diameter: 1.50m, 4IT
CCD Integration Time: 617.78 ms

Condition: $T_x:30.3^{\circ}C$, $T_i:30.9^{\circ}C$
Test Lab:
Operator:

Test Device: Inventfine CMS-2S (Plus)
Test Time: 2022-07-27 16:25:04
Inspector: