

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 92EL64532040/WH

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	20	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 400 in Nar-row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	19,8	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,20
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,376 0,376	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	3 598	Beam angle in degrees, or the range of beam angles that can be set	35	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	4	Survival factor	0,50	
the lumen maintenance factor	0,95			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,80	Colour consistency in McAdam ellipses	3	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,2	

(a) '-': not applicable;

(b) '-': not applicable;

# Spectrum Test Report

## Product Information

Product Category: COB 筒灯  
Product Number: 49  
Buyer: BARON

Product Type: BR6453-20W 4000K  
Submitted Unit: WH

## CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.3768$   $y=0.3765$   $u(u')=0.2229$   $v=0.3340$   $v'=0.5009$

CCT:  $T_c=4098K$  ( $duv=0.00094$ )

Color Ratio:  $R=0.179$   $G=0.786$   $B=0.035$

Peak Wavelength: 448nm


Half Bandwidth: 20.8nm

Dominant Wavelength: 579.2nm

Color Purity: 0.261

CRI:  $R_i$ :  $R_a=82.4$

$R_1=80$	$R_2=88$	$R_3=94$	$R_4=83$	$R_5=81$	$R_6=84$	$R_7=86$	$R_8=64$
$R_9=4$	$R_{10}=71$	$R_{11}=82$	$R_{12}=64$	$R_{13}=82$	$R_{14}=96$	$R_{15}=74$	

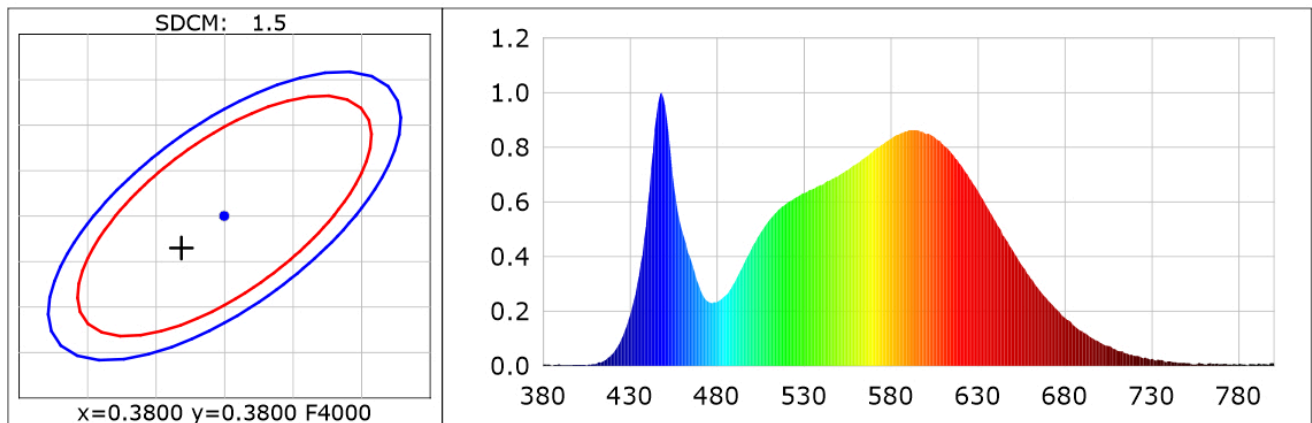

## Photometric Parameters

Luminous Flux: 1442.6 lm

Efficiency: 72.86 lm/W

Radiant Power: 4.309 W

## Electric Parameters

Voltage: 226.50V

Current: 0.1040A

Power: 19.80W

Power Factor: 0.8400

Frequency: 50.00Hz

### Test Information

Scan Range: 380nm~800nm:1nm

Stabilization Time: 0 ms

Max of Signal: 47036 (3511)

Photometric Method:

Photometric Condition: Sphere diameter: 1.50m, 4 $\pi$

CCD Integration Time: 571.79 ms

Condition:  $T_x:30.6^{\circ}C$ ,  $T_i:31.2^{\circ}C$

Test Lab:

Operator:

Test Device: Inventfine CMS-2S (Plus)

Test Time: 2022-07-28 10:54:29

Inspector: