

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 92FLCOM1040/WH

Type of light source:

| | | | |
|---|----------------|---------------------------------|-----|
| Lighting technology used: | LED | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | Integrated LED | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | Yes |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | Yes | | |
| Anti-glare shield: | No | Dimmable: | No |

Product parameters


| Parameter | Value | Parameter | Value |
|--|---------------------------|--|------------------------|
| General product parameters: | | | |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 10 | Energy efficiency class | F |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 800 in Nar-row cone (90°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 4 000 |
| On-mode power (P_{on}), expressed in W | 9,2 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,20 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | 0,20 | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 81 |
| Outer dimensions without separate control gear, lighting control | Height | Spectral power distribution in the range 250 nm to 800 nm, at full-load | See image in last page |
| | Width | | |
| | Depth | | |

| | | | | |
|---|-------|--|----------------|--|
| parts and non-lighting control parts, if any (millimetre) | | | | |
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - | |
| | | Chromaticity coordinates (x and y) | 0,366 0,364 | |
| Parameters for directional light sources: | | | | |
| Peak luminous intensity (cd) | 1 275 | Beam angle in degrees, or the range of beam angles that can be set | 38 | |
| Parameters for LED and OLED light sources: | | | | |
| R9 colour rendering index value | 0 | Survival factor | 0,50 | |
| the lumen maintenance factor | 0,93 | | | |
| Parameters for LED and OLED mains light sources: | | | | |
| displacement factor (cos ϕ_1) | 0,50 | Colour consistency in McAdam ellipses | 0 | |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W) | - | |
| Flicker metric (Pst LM) | 0,0 | Stroboscopic effect metric (SVM) | 0,0 | |

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

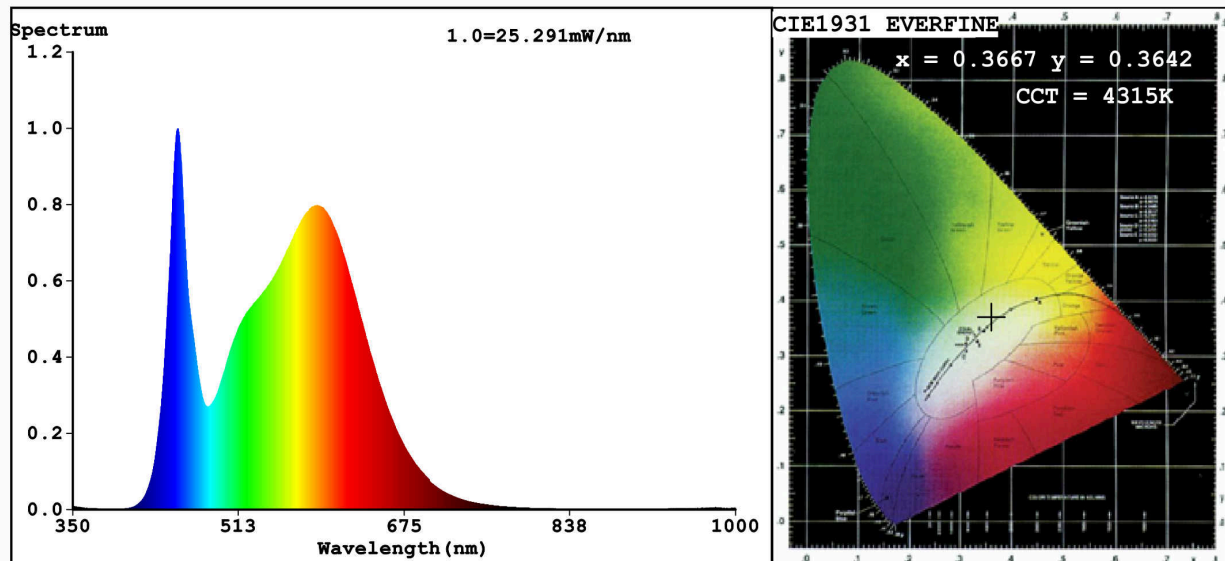

Color Parameters:

Chromaticity Coordinate: $x=0.3667$ $y=0.3642$ $u'=0.2210$ $v'=0.4939$
CCT=4315K (Duv=-0.0017) Dominant WL:Ld =579.0nm WL:Lc = --nm Purity=19.3%
Ratio:R=17.2% G=78.7% B=4.1%; Peak WL:Lp=453.3nm FWHM=23.6nm
Render Index:Ra=81.4

| | | | | | | |
|--------|--------|--------|--------|--------|--------|---------------|
| R1 =80 | R2 =90 | R3 =95 | R4 =79 | R5 =80 | R6 =85 | R7 =83 |
| R8 =60 | R9 =0 | R10=75 | R11=77 | R12=60 | R13=82 | R14=98 R15=73 |

Photo Parameters:

Flux = 1143 lm Eff. : 124.14 lm/W Fe = 3.476 W

Electrical parameters:

V = 219.98 V I = 0.08298 A P = 9.204 W PF = 0.5042

WHITE:ANSI_4500K

Status: Integral T = 47 ms Ip = 51127 (78%)

Model:SPOTLIGHT FLCOM COB
Tester:Atanas DAKOV
Temperature:25.3Deg
Manufacturer:ELMARK

Number:92FLCOM1040/BL
Date:2021-02-12 14:28:20
Humidity:65.0%
Remarks:7335