

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 92FLD2540/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	25	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 800 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	21,1	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,20
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,20	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,380 0,377	
Parameters for directional light sources:				
Peak luminous intensity (cd)	1 076	Beam angle in degrees, or the range of beam angles that can be set	90	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	10	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

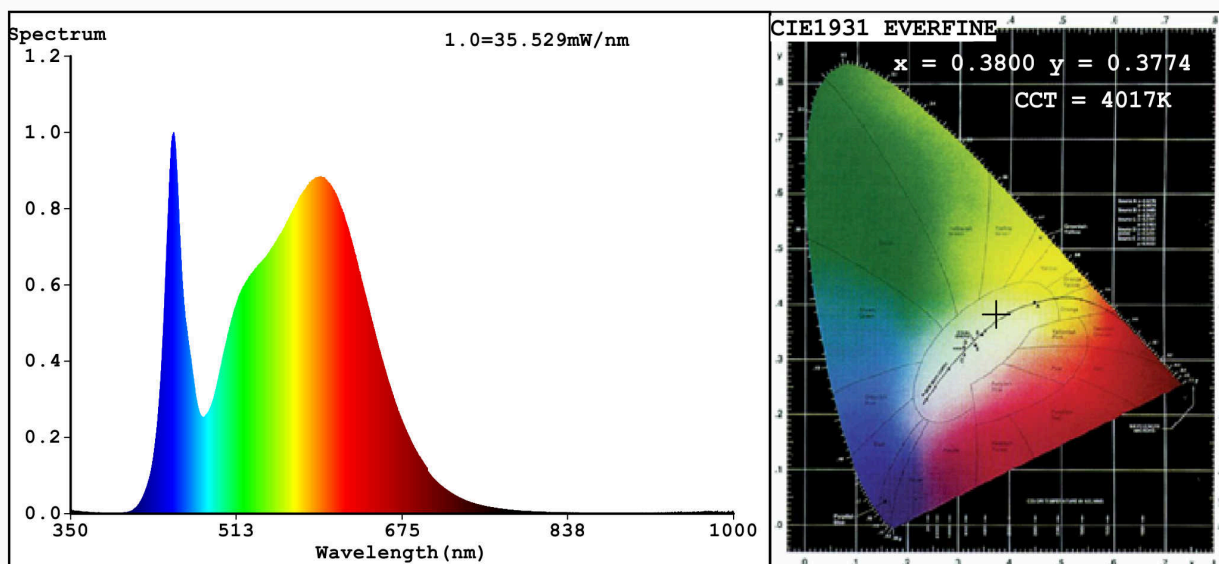

Color Parameters:

Chromaticity Coordinate: $x=0.3800$ $y=0.3774$ $u'=0.2245$ $v'=0.5018$

CCT=4017K(Duv=0.0005) Dominant WL:Ld =578.8nm Purity=27.3%

Ratio:R=18.3% G=78.1% B=3.6%; Peak WL:Lp=451.0nm FWHM=22.0nm

Render Index:Ra=83.4

R1 =82	R2 =89	R3 =95	R4 =83	R5 =82	R6 =85	R7 =86
R8 =65	R9 =10	R10=74	R11=82	R12=62	R13=84	R14=97
						R15=76

Photo Parameters:

Flux = 1817 lm Eff. : 85.38 lm/W Fe = 5.551 W

Electrical parameters:

V = 229.92 V I = 0.09559 A P = 21.28 W PF = 0.9682

WHITE:ANSI_4000K

Status: Integral T = 32 ms Ip = 51104 (78%)

Model:FDL SMD/25W
Tester:Petya Marinova
Temperature:25.3Deg
Manufacturer:ELMARK

Number:92FLD2540/WH
Date:2018-02-12 15:55
Humidity:65.0%
Remarks: VSHQ20170810_4249