

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 92PANEL018WE

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	45	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 600 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	47,6	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,390 0,393	
Parameters for directional light sources:				
Peak luminous intensity (cd)	590	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	5	Survival factor	0,50	
the lumen maintenance factor	0,95			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,70	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

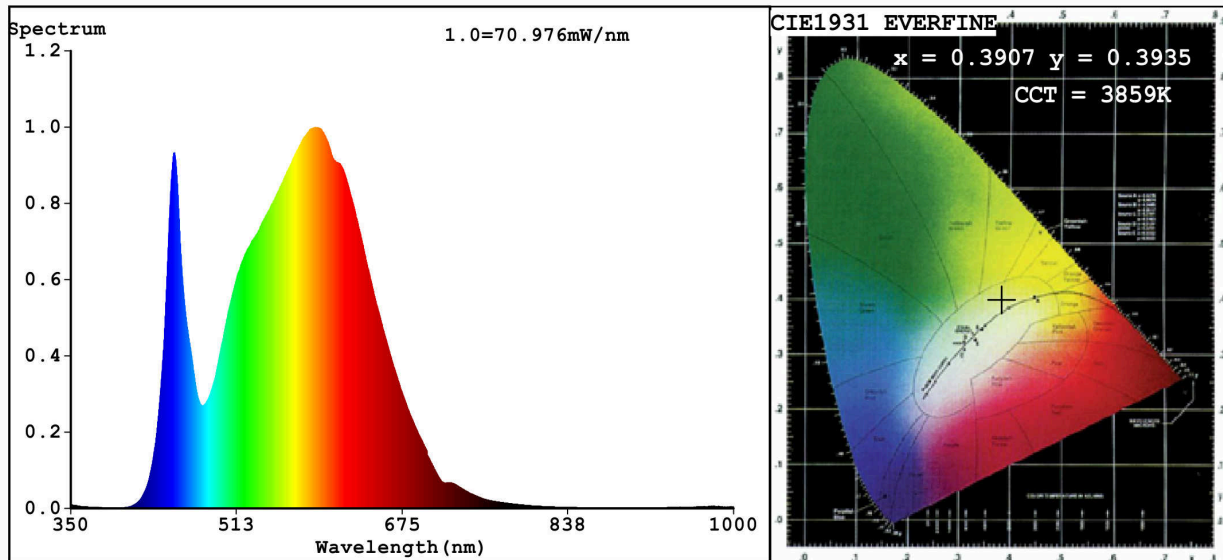

Color Parameters:

Chromaticity Coordinate: $x=0.3907$ $y=0.3935$ $u'=0.2252$ $v'=0.5103$
CCT=3859K (Duv=0.0048) Dominant WL:Ld =577.5nm WL:Lc = --nm Purity=35.4%
Ratio:R=18.1% G=78.6% B=3.3%; Peak WL:Lp=590.1nm FWHM=150.5nm
Render Index:Ra=81.5

R1 =79	R2 =87	R3 =95	R4 =80	R5 =79	R6 =83	R7 =87
R8 =63	R9 =5	R10=70	R11=78	R12=58	R13=81	R14=97 R15=72

Photo Parameters:

Flux = 4098 lm Eff. : 86.02 lm/W Fe = 12.28 W

Electrical parameters:

V = 219.96 V I = 0.2837 A P = 47.64 W PF = 0.7634

WHITE:ANSI_4000K

Status: Integral T = 25 ms Ip = 51689 (79%)

Model:LED INTERIOR LIGHTING
Tester:Atanas DAKOV
Temperature:25.3Deg
Manufacturer:ELMARK

Number:92PANEL018W
Date:2021-04-07 16:19:10
Humidity:65.0%
Remarks:7467