

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 92PANEL020CWIP44

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	48	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 800 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 400
On-mode power (P_{on}), expressed in W	48,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,375 0,376	
Parameters for directional light sources:				
Peak luminous intensity (cd)	448	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,70	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

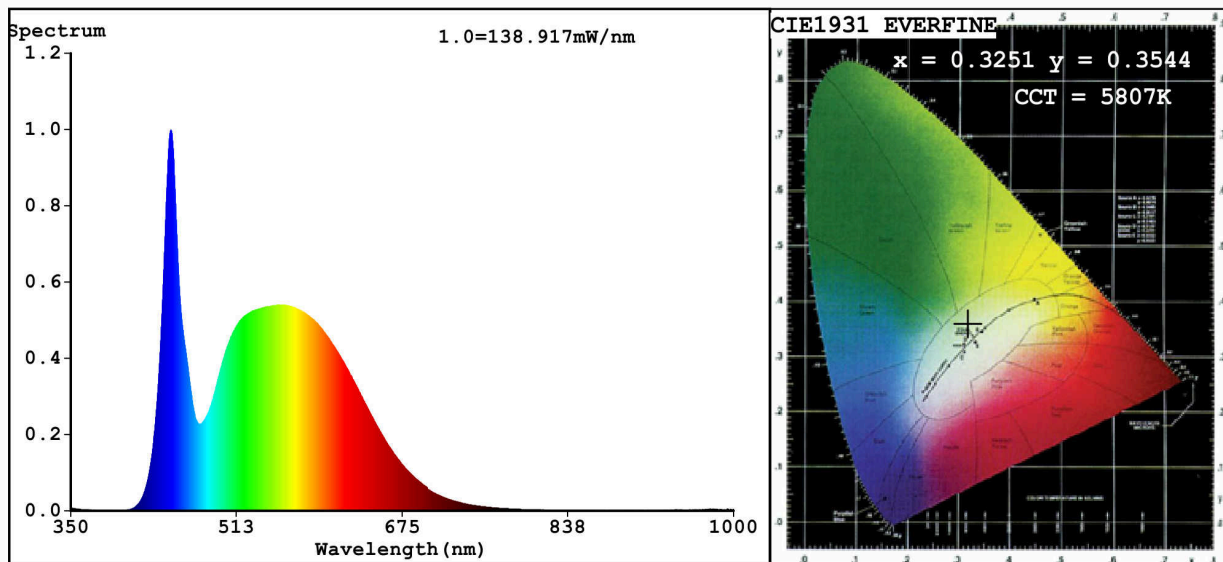

Color Parameters:

Chromaticity Coordinate: $x=0.3251$ $y=0.3544$ $u'=0.1969$ $v'=0.4831$
 CCT=5807K (Duv=0.0099) Dominant WL: $L_d = 529.0nm$ WL: $L_c = --nm$ Purity=4.4%
 Ratio: R=13.5% G=81.7% B=4.9%; Peak WL: $L_p = 448.2nm$ FWHM=19.8nm
 Render Index: $R_a = 80.9$

R1 =77	R2 =84	R3 =91	R4 =81	R5 =79	R6 =80	R7 =88
R8 =67	R9 =0	R10=64	R11=80	R12=59	R13=79	R14=95 R15=71

Photo Parameters:

Flux = 4861 lm Eff. : 97.93 lm/W $F_e = 15.17 W$

Electrical parameters:

V = 219.98 V I = 0.2314 A P = 49.64 W PF = 0.9751
 WHITE:OUT

Status: Integral T = 11 ms $I_p = 51221 (78\%)$

Model: LED INTERIOR LIGHTING
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 92PANEL020CW
 Date: 2020-10-14 10:09:42
 Humidity: 65.0%
 Remarks: 6942