

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 92PANEL020CWIP44E

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	48	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 800 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 400
On-mode power ( $P_{on}$ ), expressed in W	48,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,375 0,376	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	448	Beam angle in degrees, or the range of beam angles that can be set	120	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	0	Survival factor	0,50	
the lumen maintenance factor	0,93			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,70	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

## Spectrum Test Report

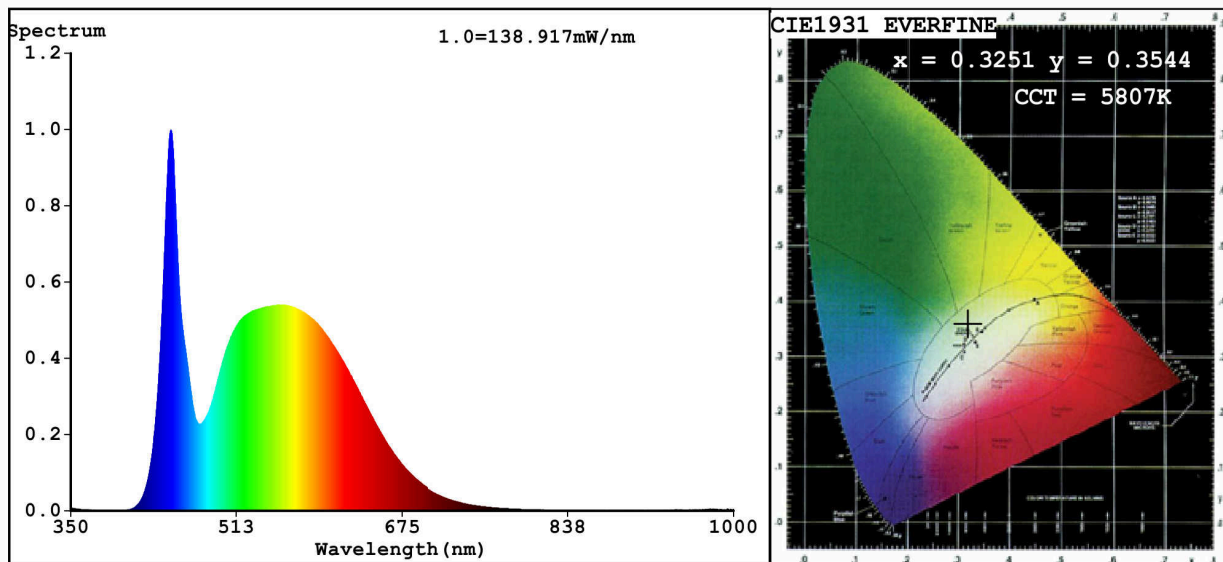

### Color Parameters:

Chromaticity Coordinate:  $x=0.3251$   $y=0.3544$   $u'=0.1969$   $v'=0.4831$   
 CCT=5807K (Duv=0.0099) Dominant WL:  $L_d = 529.0\text{nm}$  WL:  $L_c = \text{--nm}$  Purity=4.4%  
 Ratio: R=13.5% G=81.7% B=4.9%; Peak WL:  $L_p = 448.2\text{nm}$  FWHM=19.8nm  
 Render Index:  $R_a = 80.9$

R1 =77 R2 =84 R3 =91 R4 =81 R5 =79 R6 =80 R7 =88  
 R8 =67 R9 =0 R10=64 R11=80 R12=59 R13=79 R14=95 R15=71

### Photo Parameters:

Flux = 4861 lm Eff. : 97.93 lm/W  $F_e = 15.17\text{ W}$

### Electrical parameters:

V = 219.98 V I = 0.2314 A P = 49.64 W PF = 0.9751

WHITE:OUT

Status: Integral T = 11 ms  $I_p = 51221$  (78%)

Model: LED INTERIOR LIGHTING  
 Tester: Atanas DAKOV  
 Temperature: 25.3Deg  
 Manufacturer: ELMARK

Number: 92PANEL020CW  
 Date: 2020-10-14 10:09:42  
 Humidity: 65.0%  
 Remarks: 6942