

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 92PANEL022W/BL

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	48	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 044 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	50,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,376 0,377	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	11	Survival factor	0,50	
the lumen maintenance factor	0,95			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	4	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,2	

(a) '-': not applicable;

(b) '-': not applicable;

Lightsource Test Report

Product Information

Product Type: 595-595-48W

Product Number: 1

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3760$ $y=0.3771$ $u(u')=0.2221$ $v=0.3340$ $v'=0.5011$

CCT: $T_c=4126K$ ($duv=0.00147$)

Color Ratio: $R=0.179$ $G=0.781$ $B=0.040$

Peak Wavelength: 453.9nm

Half Bandwidth: 26.6nm

Dominant Wavelength: 577.8nm

Color Purity: 0.260

CRI: $R_a=83.9$

TM30: $R_f=84$, $R_g=94$

GAI: $GAI_BB_8=89.6$, $GAI_BB_15=96.6$, $GAI_EES=72.4$


$R1=82$ $R2=91$ $R3=96$ $R4=82$ $R5=82$ $R6=88$ $R7=85$ $R8=65$

$R9=11$ $R10=78$ $R11=81$ $R12=63$ $R13=85$ $R14=98$ $R15=76$

Color Quality Scale: $Q_a=83.5$, $Q_f=84.0$, $Q_p=82.3$, $Q_g=91.3$

$Q1=82$ $Q2=97$ $Q3=83$ $Q4=77$ $Q5=81$ $Q6=83$ $Q7=85$ $Q8=90$

$Q9=98$ $Q10=91$ $Q11=87$ $Q12=86$ $Q13=85$ $Q14=74$ $Q15=77$

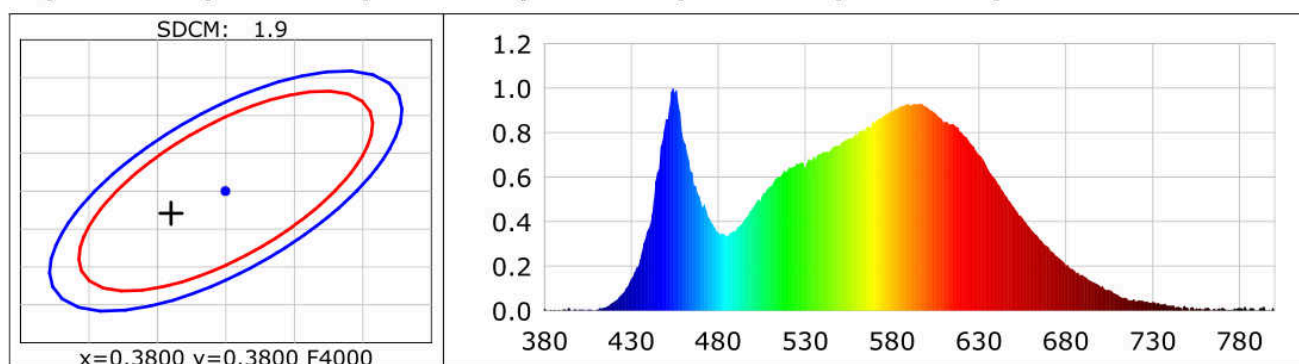

Photometric Parameters

Luminous Flux: 4044.1 lm

Efficiency: 80.85 lm/W

Radiant Power: 12.241 W

EEI: 0.17

Energy Efficiency Class: A+ (EU 874-2012)

Electric Parameters

Voltage: 230.40V

Current: 0.2250A

Power: 50.02W

Power Factor: 0.9660

Frequency: 49.99Hz

Test Information

Scan Range: 380~800:1nm

Photometric Method: sphere-spectroradiometer

Stabilization Time: 0 Sec ALC.: 0.9000

Photometric Condition: Sphere diameter: 2.00m, 4IT

Max of Signal: 45730 (5225)

CCD Integration Time: 1567.30 ms

Condition: $T_x=29.4^{\circ}C$, $T_i=26.8^{\circ}C$, R.H.:60%

Test Lab:

Operator:

Test Device: Inventfine CMS-2S (Plus)

Test Time: 2022-07-11 12:37:46

Inspector: