

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 92PANEL030CW

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	48	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 031 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 400
On-mode power (P_{on}), expressed in W	48,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,20
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,20	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,322 0,354	
Parameters for directional light sources:				
Peak luminous intensity (cd)	1 397	Beam angle in degrees, or the range of beam angles that can be set	112	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,90	
the lumen maintenance factor	0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

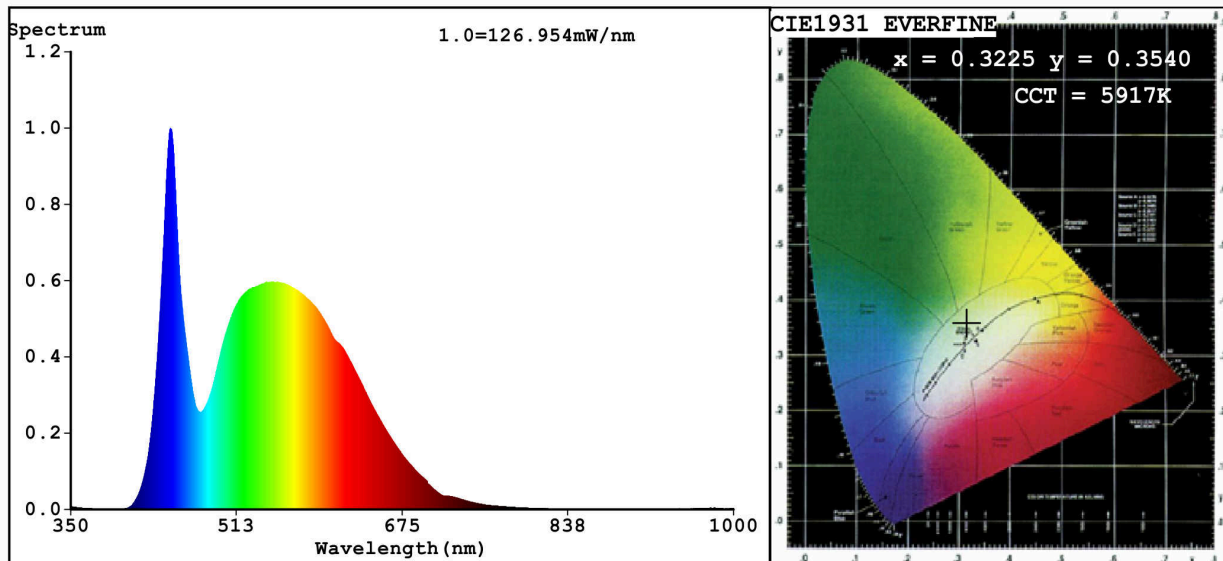

Color Parameters:

Chromaticity Coordinate: $x=0.3225$ $y=0.3540$ $u'=0.1954$ $v'=0.4825$
 CCT=5917K (Duv=0.0109) Dominant WL: $\lambda_d = 519.7\text{nm}$ WL: $\lambda_c = \text{--nm}$ Purity=4.1%
 Ratio: R=13.2% G=81.9% B=4.9%; Peak WL: $\lambda_p = 447.6\text{nm}$ FWHM=23.3nm
 Render Index: $R_a = 80.7$

R1 =77	R2 =83	R3 =90	R4 =81	R5 =79	R6 =79	R7 =88
R8 =68	R9 =0	R10=63	R11=80	R12=60	R13=78	R14=95 R15=71

Photo Parameters:

Flux = 4854 lm Eff. : 95.07 lm/W $P_e = 15.29\text{ W}$

Electrical parameters:

$V = 219.90\text{ V}$ $I = 0.2385\text{ A}$ $P = 51.06\text{ W}$ PF = 0.9735
 WHITE:OUT

Status: Integral T = 13 ms $I_p = 43537$ (66%)

Model: LED FILAMENT BULB
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 92PANEL030CW
 Date: 2020-10-26 15:01:21
 Humidity: 65.0%
 Remarks: 7145