

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 92PANEL030CWE

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	48	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 800 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 400
On-mode power ( $P_{on}$ ), expressed in W	48,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,50
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,322 0,354	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	0	Survival factor	0,90	
the lumen maintenance factor	0,96			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9	

(a) : not applicable;

(b) : not applicable;

## Spectrum Test Report

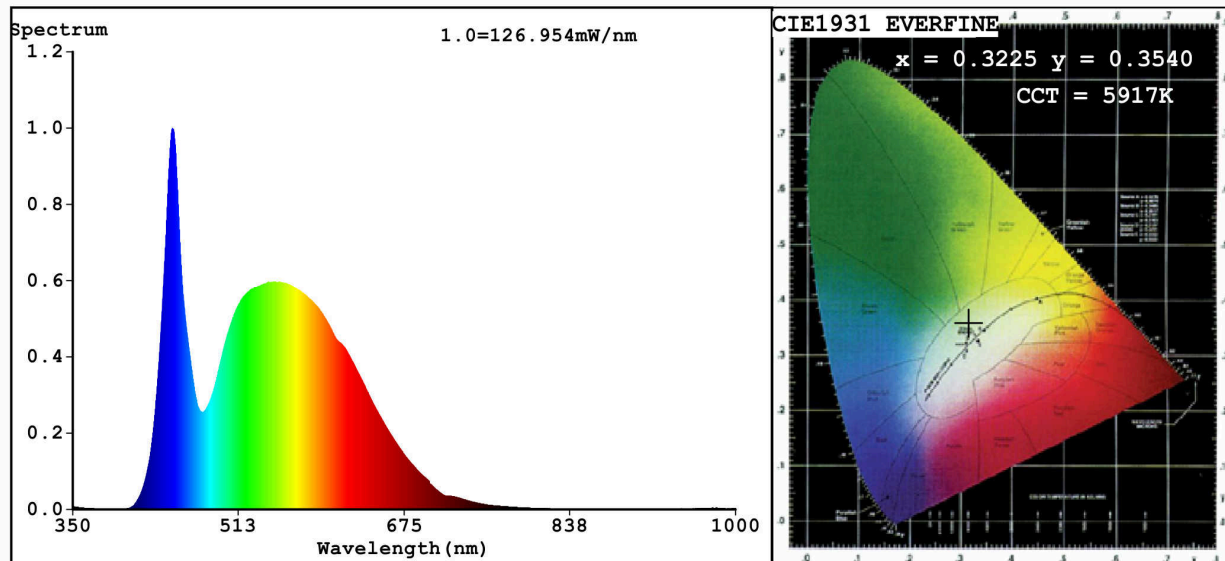

### Color Parameters:

Chromaticity Coordinate:  $x=0.3225$   $y=0.3540$   $u'=0.1954$   $v'=0.4825$   
 CCT=5917K (Duv=0.0109) Dominant WL:  $\lambda_d = 519.7\text{nm}$  WL:  $\lambda_c = \text{--nm}$  Purity=4.1%  
 Ratio: R=13.2% G=81.9% B=4.9% ; Peak WL:  $\lambda_p = 447.6\text{nm}$  FWHM=23.3nm  
 Render Index:  $R_a = 80.7$

R1 =77	R2 =83	R3 =90	R4 =81	R5 =79	R6 =79	R7 =88
R8 =68	R9 =0	R10=63	R11=80	R12=60	R13=78	R14=95 R15=71

### Photo Parameters:

Flux = 4854 lm Eff. : 95.07 lm/W  $P_e = 15.29\text{ W}$

### Electrical parameters:

$V = 219.90\text{ V}$   $I = 0.2385\text{ A}$   $P = 51.06\text{ W}$  PF = 0.9735  
 WHITE:OUT

Status: Integral T = 13 ms  $I_p = 43537$  (66%)

Model: LED FILAMENT BULB  
 Tester: Atanas DAKOV  
 Temperature: 25.3Deg  
 Manufacturer: ELMARK

Number: 92PANEL030CW  
 Date: 2020-10-26 15:01:21  
 Humidity: 65.0%  
 Remarks: 7145