

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 934FTL25CW/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated COB		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	25	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 400 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 000
On-mode power (P_{on}), expressed in W	26,9	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,318 0,336	
Parameters for directional light sources:				
Peak luminous intensity (cd)	450	Beam angle in degrees, or the range of beam angles that can be set	38	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	7	Survival factor	0,00	
the lumen maintenance factor	0,00			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ 1)	0,50	Colour consistency in McAdam ellipses	1	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

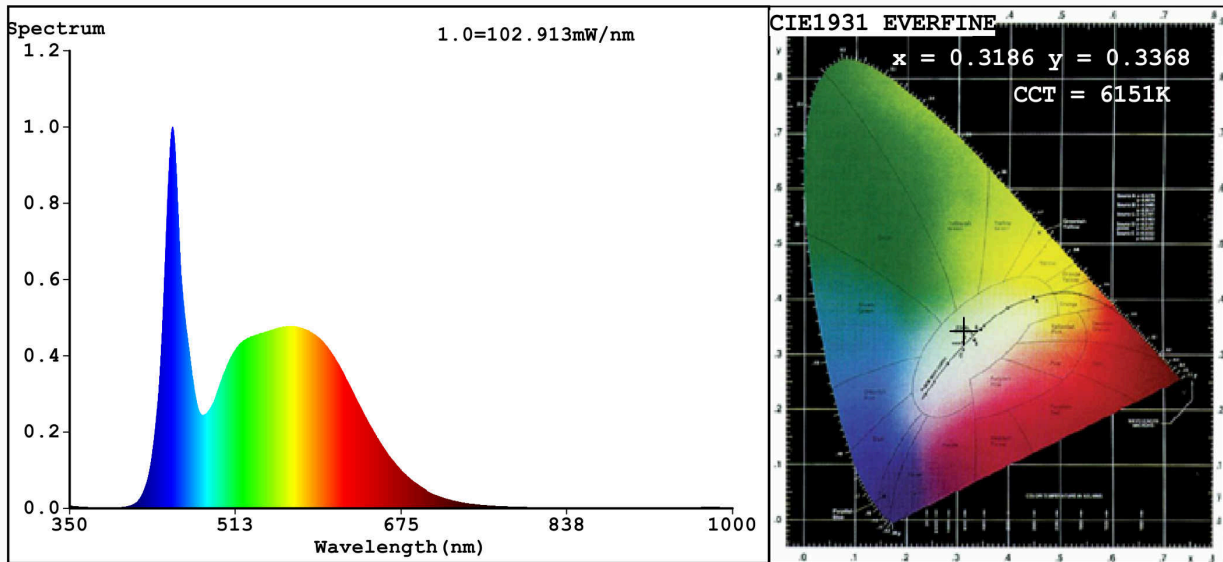

Color Parameters:

Chromaticity Coordinate: $x=0.3186$ $y=0.3368$ / $u'=0.1990$ $v'=0.4733$
 CCT=6151K (Duv=0.0042) Dominant WL:Ld =494.7nm WL:Lc = --nm Purity=4.8%
 Ratio:R=13.8% G=80.7% B=5.5%; Peak WL:Lp=450.9nm FWHM=21.6nm
 Render Index:Ra=83.5

R1 =81 R2 =88 R3 =92 R4 =83 R5 =82 R6 =83 R7 =88
 R8 =69 R9 =7 R10=72 R11=83 R12=60 R13=83 R14=96 R15=76

Photo Parameters:

Flux = 3209 lm Eff. : 119.05 lm/W Fe = 10.28 W

Electrical parameters:

V = 219.99 V I = 0.2222 A P = 26.96 W PF = 0.5516
 WHITE:ANSI_6500K

Status: Integral T = 11 ms Ip = 47953 (73%)

Model:TRACK LIGHTS FTL
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:934FTL25 CW
 Date:2021-04-09 09:12:44
 Humidity:65.0%
 Remarks:7456