

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 934FTL35WW/BL

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	35	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 150 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	34,6	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,437 0,400	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	604	Beam angle in degrees, or the range of beam angles that can be set	38	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	4	Survival factor	0,90	
the lumen maintenance factor	0,90			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,60	Colour consistency in McAdam ellipses	1	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

## Spectrum Test Report

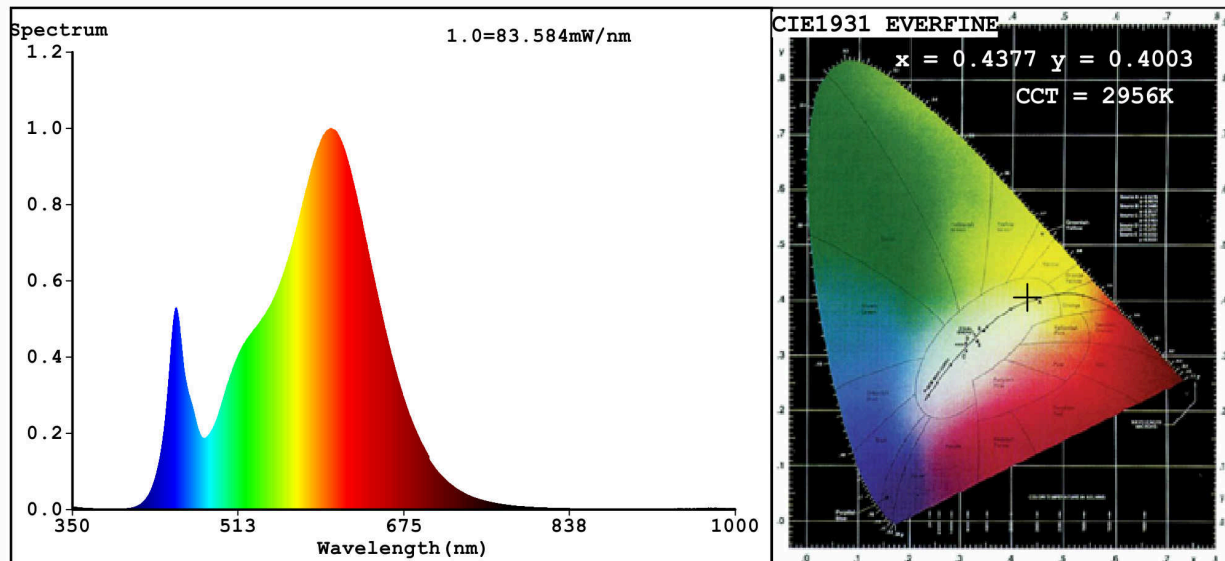

### Color Parameters:

Chromaticity Coordinate:  $x=0.4377$   $y=0.4003$   $u'=0.2527$   $v'=0.5200$   
 CCT=2956K (Duv=-0.0016) Dominant WL:Ld =583.6nm WL:Lc = --nm Purity=51.5%  
 Ratio:R=23.3% G=74.0% B=2.6%; Peak WL:Lp=604.1nm FWHM=118.7nm  
 Render Index:Ra=82.4

R1 =81	R2 =92	R3 =95	R4 =80	R5 =82	R6 =91	R7 =81
R8 =57	R9 =4	R10=82	R11=80	R12=75	R13=84	R14=98 R15=73

### Photo Parameters:

Flux = 3957 lm Eff. : 114.10 lm/W Fe = 12.05 W

### Electrical parameters:

V = 219.97 V I = 0.2496 A P = 34.68 W PF = 0.6316  
 WHITE:ANSI\_3000K

Status: Integral T = 12 ms Ip = 48866 (75%)

Model:TRACK LIGHTS FTL  
 Tester:Atanas DAKOV  
 Temperature:25.3Deg  
 Manufacturer:ELMARK

Number:934FTL35WW BL  
 Date:2021-04-08 14:19:58  
 Humidity:65.0%  
 Remarks:7456