

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 93FGNL2040/BL

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	20	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 000 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	18,9	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,20
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0,20	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,384 0,382	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	385	Beam angle in degrees, or the range of beam angles that can be set	112	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	4	Survival factor	0,50	
the lumen maintenance factor	0,95			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	4	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,6	Stroboscopic effect metric (SVM)	0,2	

(a) '-': not applicable;

(b) '-': not applicable;

## Lightsource Test Report

### Product Information

Product Number: 14

### CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.3846$   $y=0.3828$   $u(u')=0.2254$   $v=0.3365$   $v'=0.5048$

CCT:  $T_c=3935K$  ( $duv=0.00161$ )

Color Ratio:  $R=0.184$   $G=0.775$   $B=0.041$

Peak Wavelength: 595nm

Half Bandwidth: 146.7nm


Dominant Wavelength: 578.5nm

Color Purity: 0.303

CRI:  $R_i$ :  $R_a=82.8$

$R_1=81$   $R_2=92$   $R_3=96$   $R_4=80$   $R_5=82$   $R_6=89$   $R_7=83$   $R_8=61$

$R_9=4$   $R_{10}=80$   $R_{11}=79$   $R_{12}=64$   $R_{13}=84$   $R_{14}=98$   $R_{15}=74$

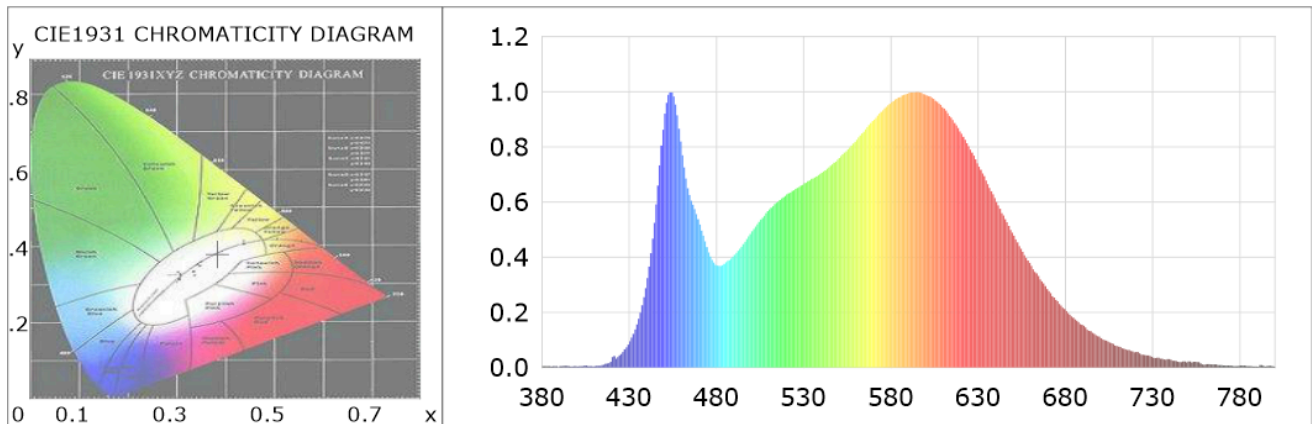

### Photometric Parameters

Luminous Flux: 934.5 lm

Efficiency: 49.45 lm/W

Radiant Power: 2.796 W

### Electric Parameters

Voltage: 220.60V

Current: 0.1700A

Power: 18.90W

Power Factor: 0.5030

Frequency: 50.00Hz

### Test Information

Scan Range: 380nm~800nm:1nm

Stabilization Time: 6 Sec

Max of Signal: 47858 (3275)

Photometric Method:

Photometric Condition: Sphere diameter: 1.50m, 4 $\pi$

CCD Integration Time: 1119.54 ms

Condition:  $T_x=26.1^{\circ}C$ ,  $T_i=25.5^{\circ}C$

Test Lab:

Operator:

Test Device: Inventfine CMS-2S (Plus)

Test Time: 2022-03-31 19:45:28

Inspector: