

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 93FTL25WW/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED COB		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	25	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 300 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	25,2	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,437 0,405	
Parameters for directional light sources:				
Peak luminous intensity (cd)	601	Beam angle in degrees, or the range of beam angles that can be set	38	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	3	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	3	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

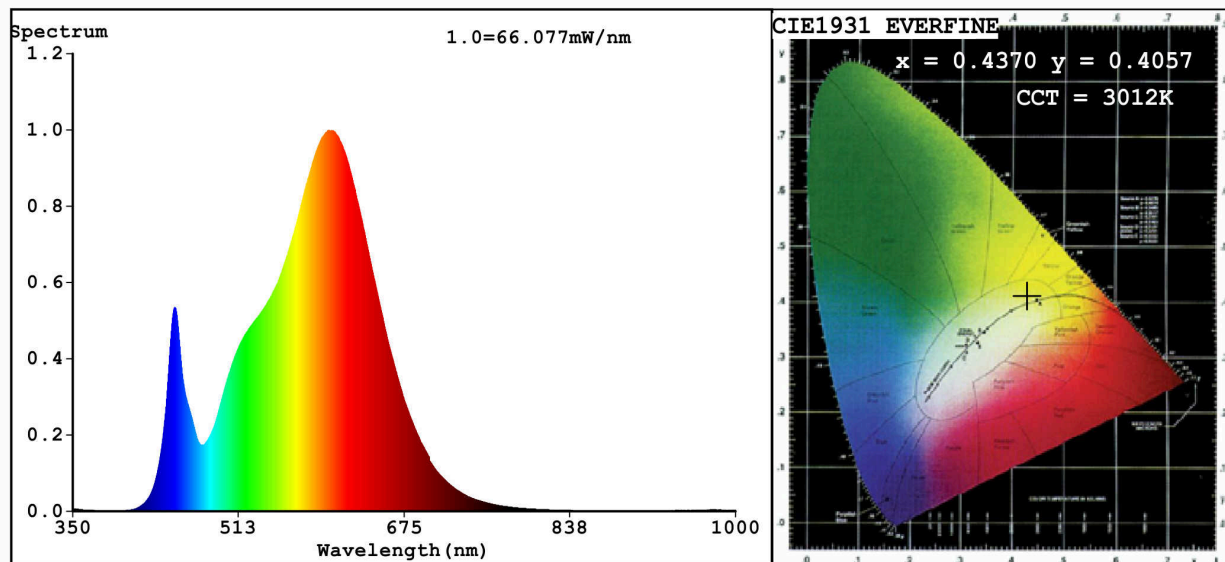

Color Parameters:

Chromaticity Coordinate: $x=0.4370$ $y=0.4057$ $u'=0.2499$ $v'=0.5220$
 CCT=3012K (Duv=0.0006) Dominant WL:Ld =582.5nm WL:Lc = --nm Purity=52.9%
 Ratio:R=22.8% G=74.7% B=2.5%; Peak WL:Lp=601.5nm FWHM=126.4nm
 Render Index:Ra=82.4

R1 =81	R2 =91	R3 =96	R4 =81	R5 =81	R6 =89	R7 =82
R8 =58	R9 =3	R10=79	R11=81	R12=72	R13=83	R14=99 R15=72

Photo Parameters:

Flux = 3206 lm Eff. : 126.91 lm/W Fe = 9.656 W

Electrical parameters:

V = 220.04 V I = 0.1189 A P = 25.26 W PF = 0.9657

WHITE:ANSI_3000K

Status: Integral T = 16 ms Ip = 54026 (82%)

Model:TRACK LIGHTS FTL
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:93FTL25 WW
 Date:2020-07-15 14:36:35
 Humidity:65.0%
 Remarks:6664