

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 93FTL35W/BL

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	35	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 150 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	35,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,03
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,375 0,377	
Parameters for directional light sources:				
Peak luminous intensity (cd)	449	Beam angle in degrees, or the range of beam angles that can be set	38	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	5	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,60	Colour consistency in McAdam ellipses	3	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

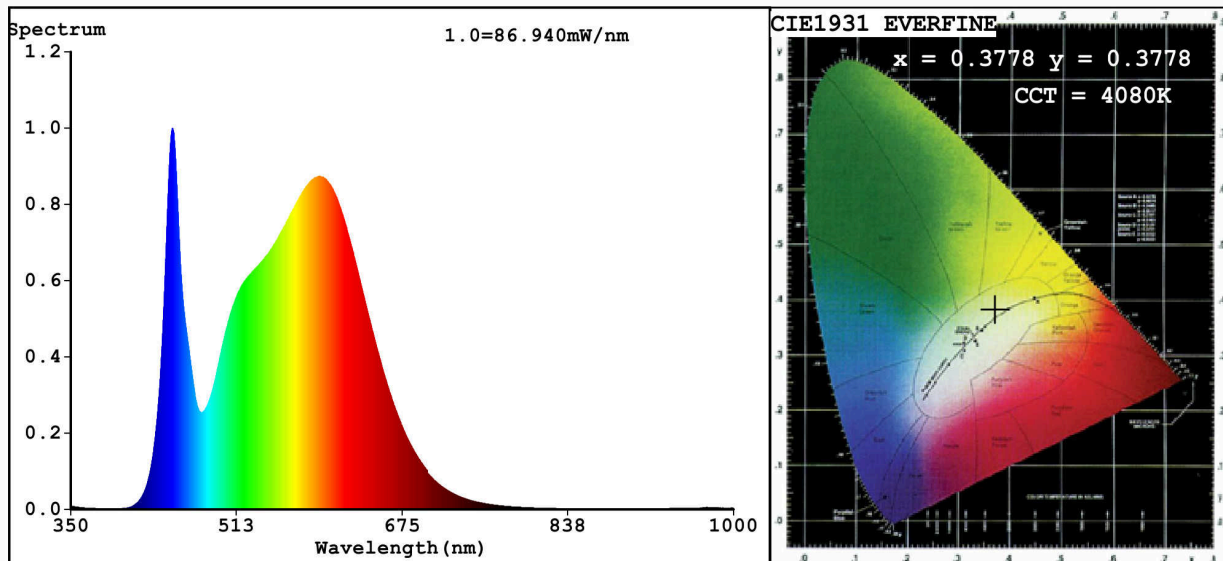

Color Parameters:

Chromaticity Coordinate: $x=0.3778$ $y=0.3778$ $u'=0.2230$ $v'=0.5017$
 CCT=4080K (Duv=0.0013) Dominant WL: $\lambda_d = 578.0\text{nm}$ WL: $\lambda_c = \text{--nm}$ Purity=26.8%
 Ratio: R=18.0% G=78.3% B=3.7% ; Peak WL: $\lambda_p = 449.9\text{nm}$ FWHM=21.2nm
 Render Index: $R_a = 83.0$

R1 =81	R2 =89	R3 =95	R4 =82	R5 =81	R6 =85	R7 =86
R8 =64	R9 =5	R10=74	R11=82	R12=63	R13=83	R14=98
						R15=74

Photo Parameters:

Flux = 4392 lm Eff. : 132.82 lm/W Fe = 13.27 W

Electrical parameters:

V = 220.00 V I = 0.1566 A P = 33.07 W PF = 0.9601
 WHITE: ANSI_4000K

Status: Integral T = 10 ms Ip = 39242 (60%)

Model: TRACK LIGHTS FTL
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 93FTL35W/BL
 Date: 2020-07-16 08:36:21
 Humidity: 65.0%
 Remarks: 6664