

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 93K304L12CCT/BL

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	960 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 000 or 5 700
On-mode power (P_{on}), expressed in W	12,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,05	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	286	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	72	
	Depth	42	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,321 0,348
Parameters for directional light sources:			
Peak luminous intensity (cd)	445	Beam angle in degrees, or the range of beam angles that can be set	30
Parameters for LED and OLED light sources:			
R9 colour rendering index value	2	Survival factor	0,90
the lumen maintenance factor	1,00		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,20	Colour consistency in McAdam ellipses	1
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

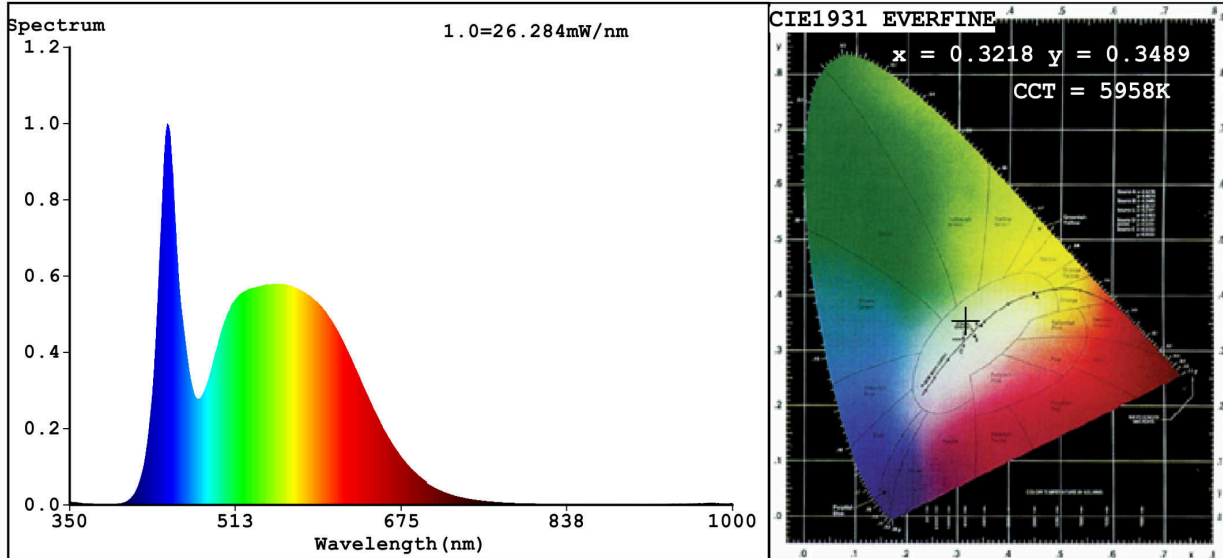

Color Parameters:

Chromaticity Coordinate: $x=0.3218$ $y=0.3489$ / $u'=0.1968$ $v'=0.4799$
 CCT=5958K (Duv=0.0087) Dominant WL:Ld =510.7nm WL:Lc = --nm Purity=3.6%
 Ratio:R=13.6% G=81.2% B=5.2%; Peak WL:Lp=445.9nm FWHM=24.1nm
 Render Index:Ra=82.4 AvgR=75.1 TM30:Rf=85 Rg=94 Lav=542.4nm

R1 =79 R2 =85 R3 =92 R4 =83 R5 =81 R6 =82 R7 =88
 R8 =69 R9 =2 R10=67 R11=83 R12=66 R13=80 R14=96 R15=73

Photo Parameters:

Flux = 999.6 lm Eff. : 82.90 lm/W Fe = 3.166 W

Electrical parameters:

V = 225.23 V I = 0.1904 A P = 12.06 W PF = 0.2812


WHITE:OUT

Status: Integral T = 48 ms Ip = 50481 (77%)

Model:LED FLOODLIGHT
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:93K302L12CCT/BL
 Date:2021-06-30 14:00:53
 Humidity:65.0%
 Remarks:MOSTRA

Model placed on the Union market.



EPREL registration number: 1962900

<https://eprel.ec.europa.eu/qr/1962900>

Supplier: ELMARK INDUSTRIES SC (Importer)

Website: www.elmarkholding.eu

Customer care service:

Name: ELMARK INDUSTRIES SC

Website: www.elmarkholding.eu

Email: eelabels@elmarkholding.eu

Phone: +35952575545

Address:

bul.Dobrudja 2
9300 Dobrich
Bulgaria