

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 93M20FFL0630/BL

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	320 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	9,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,20
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,20	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,435 0,405	
Parameters for directional light sources:				
Peak luminous intensity (cd)	129	Beam angle in degrees, or the range of beam angles that can be set	98	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,50	
the lumen maintenance factor	0,95			

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

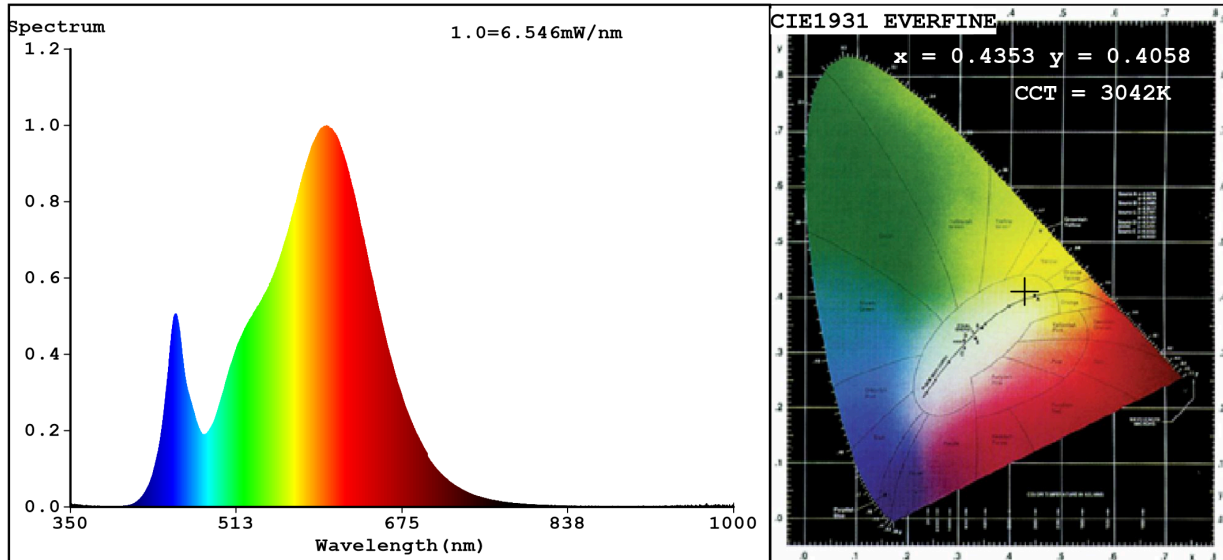

Color Parameters:

Chromaticity Coordinate: $x=0.4353$ $y=0.4058$ $u'=0.2488$ $v'=0.5218$
 CCT=3042K (Duv=0.0009) Dominant WL: $L_d=582.3\text{nm}$ WL: $L_c = \text{--nm}$ Purity=52.4%
 Ratio: R=22.3% G=75.2% B=2.5% Peak WL: $L_p=601.2\text{nm}$ FWHM=126.4nm
 Render Index: $R_a=80.8$

R1 =79	R2 =90	R3 =96	R4 =78	R5 =79	R6 =87	R7 =82
R8 =56	R9 =0	R10=76	R11=77	R12=68	R13=81	R14=99
						R15=71

Photo Parameters:

Flux = 321.4 lm Eff. : 35.08 lm/W Fe = 961.1 mW

Electrical parameters:

V = 229.75 V I = 0.1023 A P = 9.164 W PF = 0.3900

WHITE: ANSI_3000K

Status: Integral T = 140 ms Ip = 44825 (68%)

Model: LED INTERIOR LIGHTING
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 93M20FFL0630 BL
 Date: 2022-10-20 14:54:09
 Humidity: 65.0%
 Remarks: 8751