

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 93M20FL3040/BL

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	30	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 600 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	35,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,20
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,20	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,381 0,377	
Parameters for directional light sources:				
Peak luminous intensity (cd)	981	Beam angle in degrees, or the range of beam angles that can be set	93	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	5	Survival factor	0,50	
the lumen maintenance factor	0,95			

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

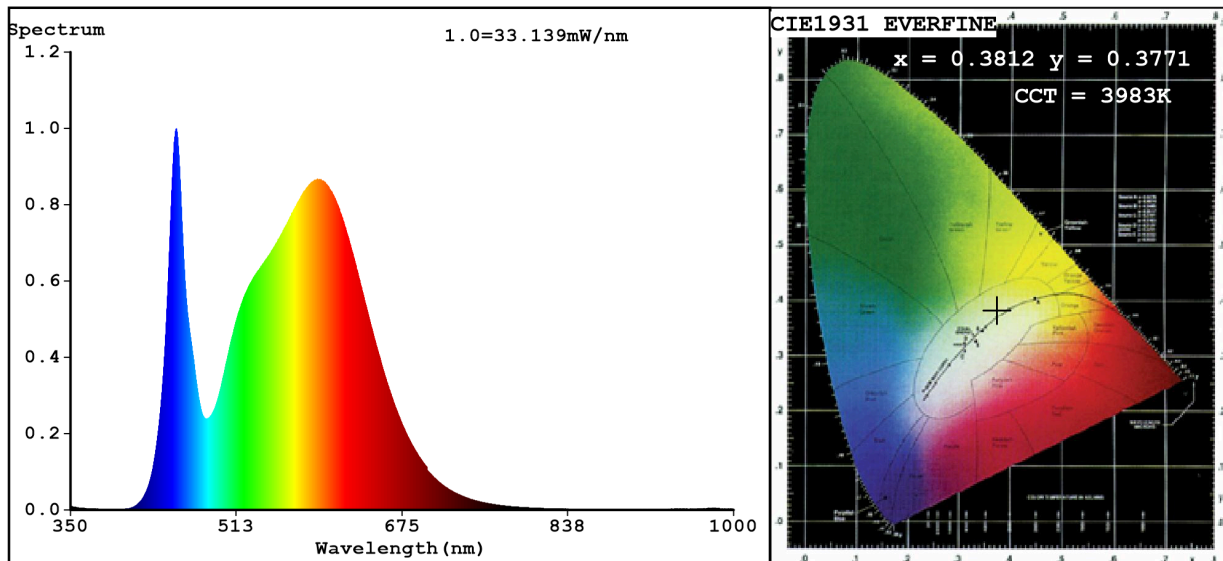

Color Parameters:

Chromaticity Coordinate: $x=0.3812$ $y=0.3771$ $u'=0.2254$ $v'=0.5019$
 CCT=3983K (Duv=-0.0000) Dominant WL:Ld =579.2nm WL:Lc = --nm Purity=27.6%
 Ratio:R=18.2% G=78.2% B=3.5% Peak WL:Lp=454.0nm FWHM=21.7nm
 Render Index:Ra=81.9

R1 =80	R2 =89	R3 =94	R4 =80	R5 =80	R6 =84	R7 =85
R8 =63	R9 =5	R10=73	R11=78	R12=57	R13=83	R14=97 R15=74

Photo Parameters:

Flux = 1639 lm Eff. : 45.63 lm/W Fe = 4.963 W

Electrical parameters:

V = 229.75 V I = 0.3156 A P = 35.93 W PF = 0.4956

WHITE:ANSI_4000K

Status: Integral T = 25 ms Ip = 35502 (54%)

Model:LED INTERIOR LIGHTING
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:93M20FL3040 BL
 Date:2022-10-19 14:15:05
 Humidity:65.0%
 Remarks:8751