

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 93MFFL1240/BL

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	820 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	18,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	84
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,382 0,380
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	453	Beam angle in degrees, or the range of beam angles that can be set	120
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	15	Survival factor	0,50
the lumen maintenance factor	0,93		

(a): not applicable;

(b): not applicable;

**Spectrum Test Report**

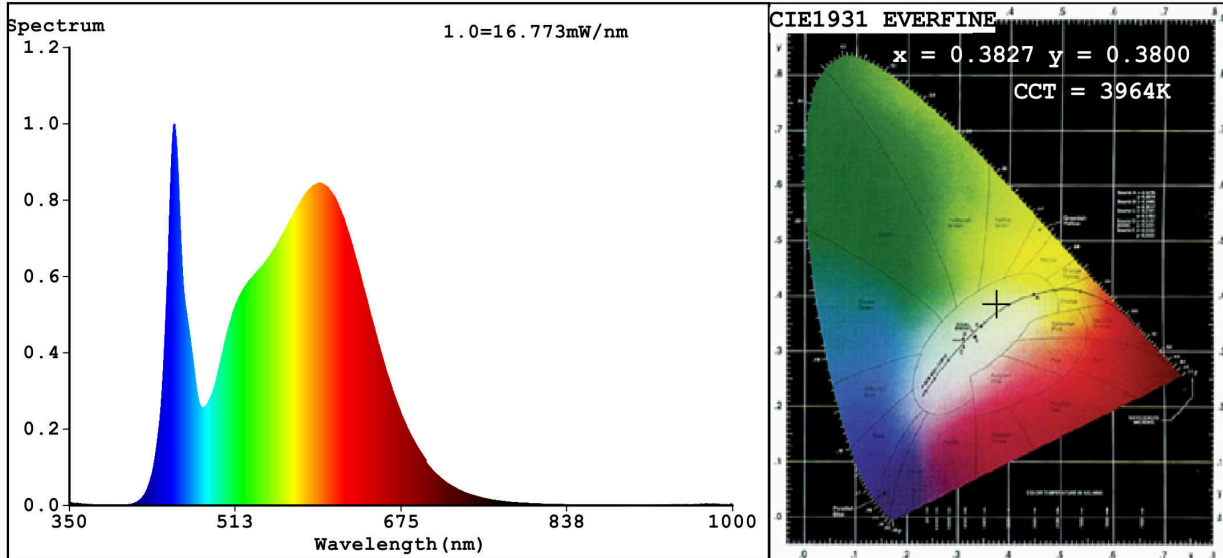

**Color Parameters:**

Chromaticity Coordinate:  $x=0.3827$   $y=0.3800$  /  $u'=0.2253$   $v'=0.5033$   
 CCT=3964K (Duv=0.0009) Dominant WL:  $L_d = 578.8\text{nm}$  WL:  $L_c = \text{--nm}$  Purity=28.9%  
 Ratio: R=18.6% G=77.7% B=3.7% ; Peak WL:  $L_p = 453.0\text{nm}$  FWHM=20.5nm  
 Render Index:  $R_a = 84.3$  AvgR=78.0 TM30:  $R_f = 85$   $R_g = 95$   $L_{av} = 571.1\text{nm}$

R1 =83	R2 =91	R3 =96	R4 =82	R5 =83	R6 =87	R7 =86	
R8 =66	R9 =15	R10=78	R11=82	R12=61	R13=85	R14=98	R15=77

**Photo Parameters:**

Flux = 818.8 lm Eff. : 43.37 lm/W  $F_e = 2.506$  W

**Electrical parameters:**

V = 225.22 V I = 0.2498 A P = 18.88 W PF = 0.3356

WHITE:ANSI\_4000K

Status: Integral T = 51 ms  $I_p = 33289$  (51%)

Model: LED floodlight  
 Tester: Atanas DAKOV  
 Temperature: 25.3Deg  
 Manufacturer: ELMARK

Number: 93MFFL1240 BL  
 Date: 2021-11-17 15:49:18  
 Humidity: 65.0%  
 Remarks: 7876