

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 93PFLD6030/BL

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	60	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	6 000 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	52,9	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,20
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0,20	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,434 0,399	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	6 060	Beam angle in degrees, or the range of beam angles that can be set	59	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	4	Survival factor	1,00	
the lumen maintenance factor	0,95			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	1	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,2	Stroboscopic effect metric (SVM)	0,2	

(a) '-': not applicable;

(b) '-': not applicable;

## Spectrum Test Report

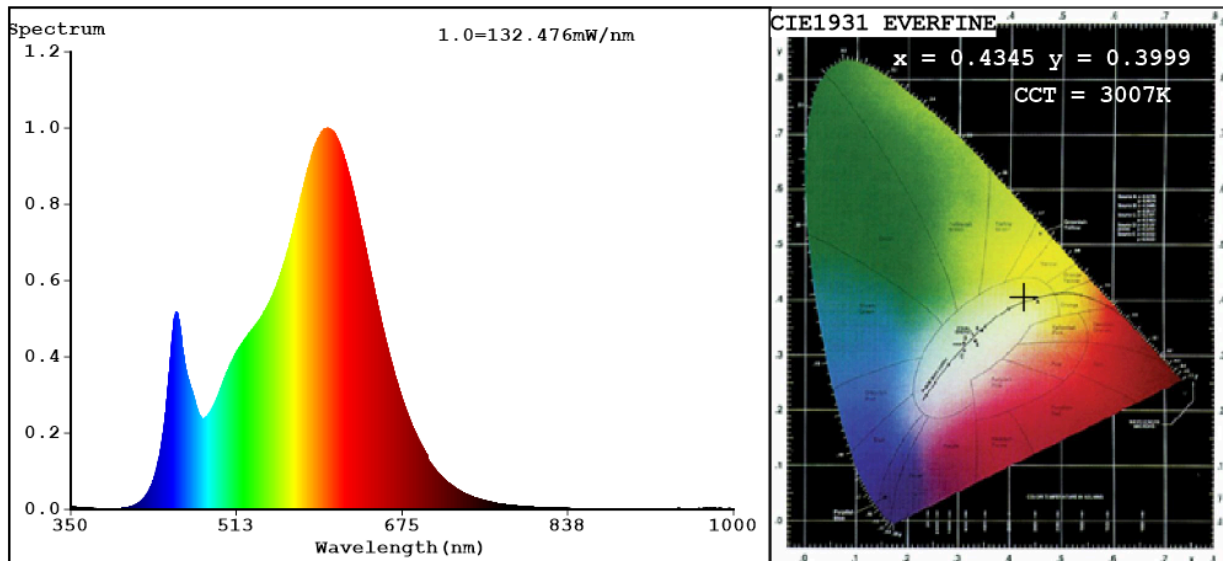

### Color Parameters:

Chromaticity Coordinate:  $x=0.4345$   $y=0.3999$   $u'=0.2508$   $v'=0.5194$   
 CCT=3007K (Duv=-0.0013) Dominant WL:Ld =583.3nm WL:Lc = --nm Purity=50.4%  
 Ratio:R=23.0% G=74.1% B=3.0% ; Peak WL:Lp=602.1nm FWHM=118.0nm  
 Render Index:Ra=82.4

R1 =82	R2 =93	R3 =93	R4 =80	R5 =83	R6 =92	R7 =80
R8 =56	R9 =4	R10=85	R11=80	R12=76	R13=85	R14=97 R15=73

### Photo Parameters:

Flux = 6334 lm Eff. : 119.59 lm/W Fe = 19.33 W

### Electrical parameters:

V = 229.45 V I = 0.4189 A P = 52.96 W PF = 0.5510  
 WHITE:ANSI\_3000K

Status: Integral T = 7 ms Ip = 45375 (69%)

Model:LED INDOOR LIGHTING  
 Tester:Atanas DAKOV  
 Temperature:25.3Deg  
 Manufacturer:ELMARK

Number:93PFLD6030 BL  
 Date:2022-09-08 10:14:44  
 Humidity:65.0%  
 Remarks:8817