

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 93TL291L10WW/WH

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	850 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	10,3	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	92
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,457 0,413	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	627	Beam angle in degrees, or the range of beam angles that can be set	24	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	61	Survival factor	0,50	
the lumen maintenance factor	0,93			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

# Lightsource Test Report

## Product Information

Product Type: 93TL291L10W

Product Number: 21

## CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.4574$   $y=0.4131$   $u(u')=0.2598$   $v=0.3519$   $v'=0.5279$

CCT:  $T_c=2754K$  ( $duv=0.00113$ )

Color Ratio:  $R=0.259$   $G=0.718$   $B=0.023$

Peak Wavelength: 627nm

Half Bandwidth: 152.9nm

Dominant Wavelength: 583.6nm

Color Purity: 0.613

CRI:  $R_i$ :  $R_a=92.7$

$R_1=93$

$R_2=96$

$R_3=97$

$R_4=93$

$R_5=92$

$R_6=95$

$R_7=92$

$R_8=83$

$R_9=61$

$R_{10}=89$



$R_{11}=94$

$R_{12}=80$

$R_{13}=93$

$R_{14}=98$

$R_{15}=89$

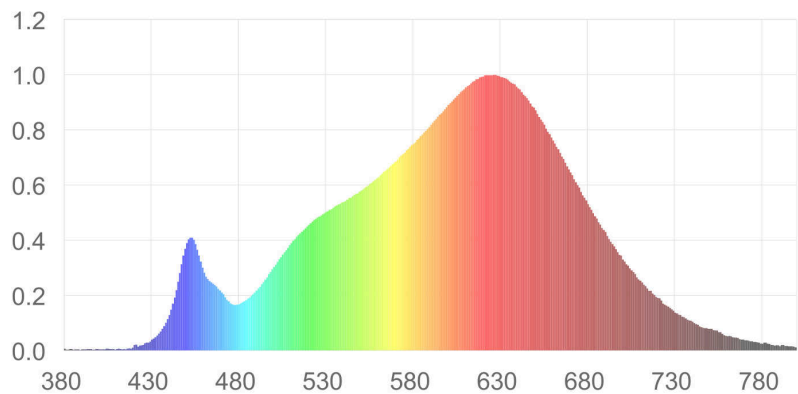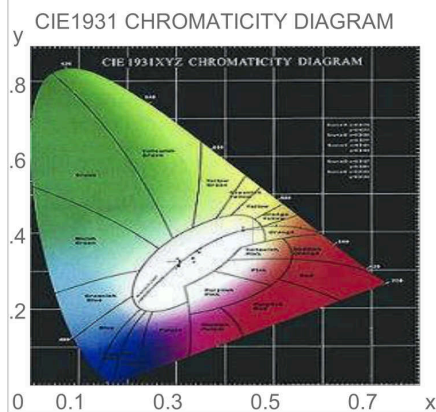

## Photometric Parameters

Luminous Flux: 832.8 lm

Efficiency: 80.86 lm/W

Radiant Power: 2.915 W

## Electric Parameters

Voltage: 220.60V

Current: 0.0890A

Power: 10.30W

Power Factor: 0.5250

Frequency: 50.00Hz

### Test Information

Scan Range: 380nm~800nm:1nm

Stabilization Time: 5 Sec

Max of Signal: 44925 (3650)

Photometric Method:

Photometric Condition: Sphere diameter: 1.50m, 4

CCD Integration Time: 1018.70 ms

Condition:  $T_x=29.5^{\circ}C$ ,  $T_i=29.1^{\circ}C$

Test Lab:

Operator:

Test Device: Inventfine CMS-2S (Plus)

Test Time: 2021-11-05 16:29:17

Inspector: