

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: STELLAR

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 93TL5020CW/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	20	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 400 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 000
On-mode power (P_{on}), expressed in W	20,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,321 0,333
Parameters for directional light sources:			
Peak luminous intensity (cd)	448	Beam angle in degrees, or the range of beam angles that can be set	36
Parameters for LED and OLED light sources:			
R9 colour rendering index value	5	Survival factor	0,50
the lumen maintenance factor	0,95		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	Yes ^(b)	If yes then replacement claim (W)	60
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

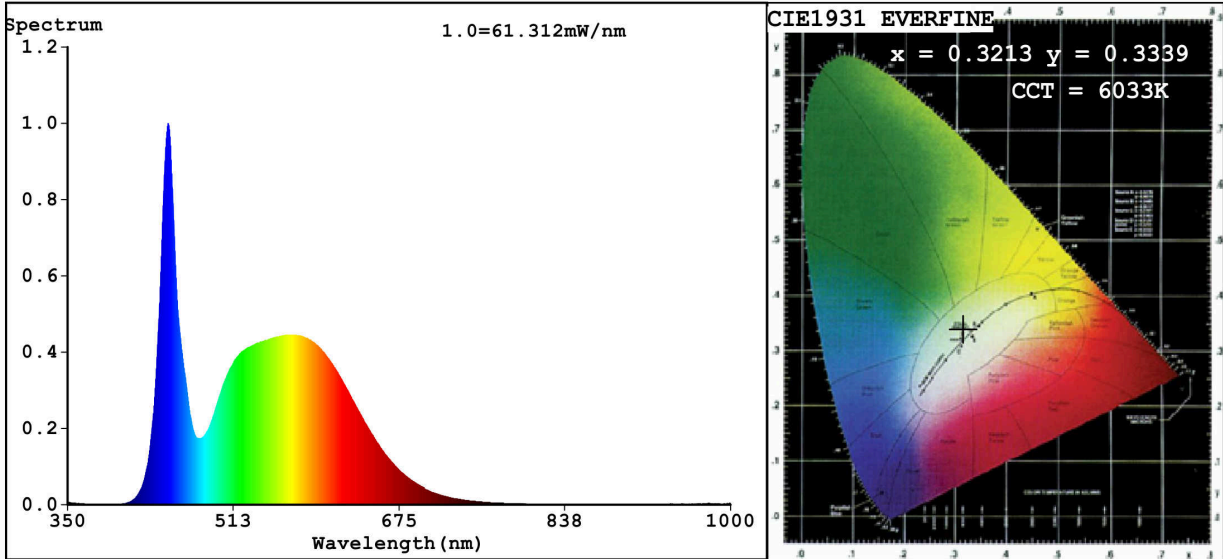

Color Parameters:

Chromaticity Coordinate: $x=0.3213$ $y=0.3339$ $u'=0.2019$ $v'=0.4722$

CCT=6033K(Duv=0.0015) Dominant WL:Ld =492.4nm Purity=4.0%

Ratio:R=13.9% G=81.2% B=4.9%; Peak WL:Lp=448.6nm FWHM=19.0nm

Render Index:Ra=81.8

R1 =80 R2 =85 R3 =88 R4 =83 R5 =82 R6 =80 R7 =87
R8 =69 R9 =5 R10=65 R11=83 R12=58 R13=81 R14=93 R15=76

Photo Parameters:

Flux = 1761 lm Eff. : 87.87 lm/W Fe = 5.622 W

Electrical parameters:

V = 229.88 V I = 0.1674 A P = 20.04 W PF = 0.5208

WHITE:ANSI_6500K

Status: Integral T = 14 ms Ip = 47206 (72%)

Model:TWO LINES SKY TL/20W
Tester:Petya Marinova
Temperature:25.3Deg
Manufacturer:ELMARK

Number:93TL5020CW/WH
Date:2019-03-07 16:14
Humidity:65.0%
Remarks:018V044A_5438