

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 93TLOM180W/GR

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	20	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 800 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	20,2	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	130	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	130	
	Depth	98	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,372 0,377
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	5 539	Beam angle in degrees, or the range of beam angles that can be set	24
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	2	Survival factor	0,50
the lumen maintenance factor	0,93		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	0
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

**Spectrum Test Report**

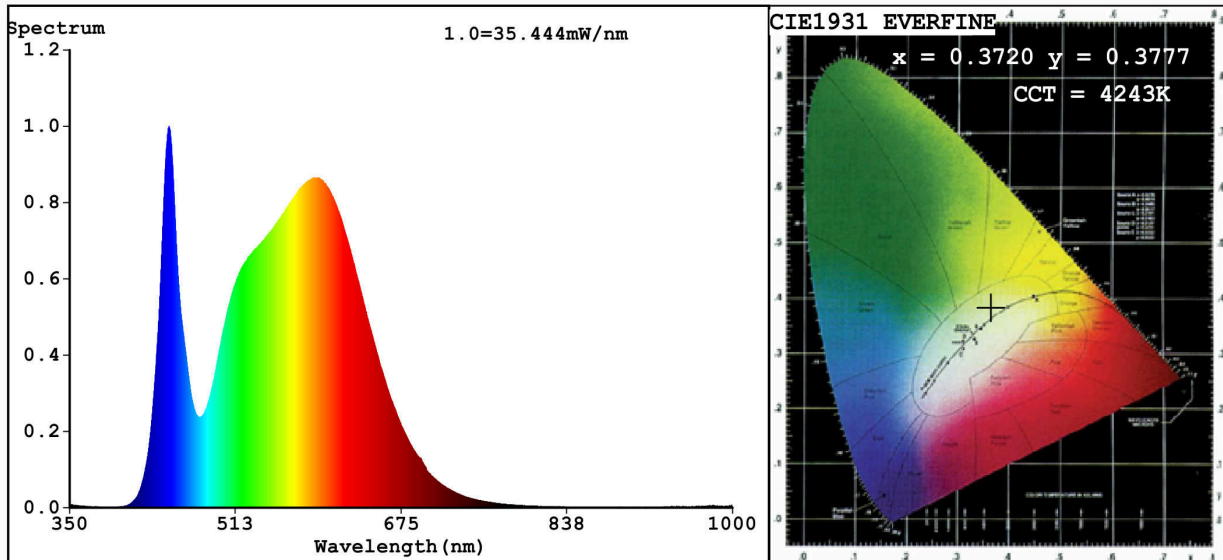

**Color Parameters:**

Chromaticity Coordinate:  $x=0.3720$   $y=0.3777$  /  $u'=0.2192$   $v'=0.5008$

CCT=4243K(Duv=0.0030) Dominant WL:Ld =576.3nm Purity=25.0%

Ratio:R=17.2% G=79.3% B=3.5%; Peak WL:Lp=447.5nm FWHM=22.6nm

Render Index:Ra=81.6

R1 =79	R2 =86	R3 =93	R4 =82	R5 =80	R6 =82	R7 =86	
R8 =64	R9 =2	R10=68	R11=81	R12=61	R13=81	R14=96	R15=73

**Photo Parameters:**

Flux = 1831 lm Eff. : 90.31 lm/W Fe = 5.521 W

**Electrical parameters:**

V = 229.82 V I = 0.09686 A P = 20.28 W PF = 0.9109

WHITE:ANSI\_4000K

Status: Integral T = 31 ms Ip = 48915 (75%)

Model:SKY TLOM180 COB/20W  
Tester:Petya Marinova  
Temperature:25.3Deg  
Manufacturer:ELMARK

Number:93TLOM180W/GR  
Date:2018-02-16 10:24  
Humidity:65.0%  
Remarks:O17V055À\_4281