

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 93TLOM3040/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	30	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 300 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	29,4	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	240	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	90	
	Depth	90	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,381 0,383
Parameters for directional light sources:			
Peak luminous intensity (cd)	9 571	Beam angle in degrees, or the range of beam angles that can be set	24
Parameters for LED and OLED light sources:			
R9 colour rendering index value	0	Survival factor	0,50
the lumen maintenance factor	0,95		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	0
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,6	Stroboscopic effect metric (SVM)	0,2

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

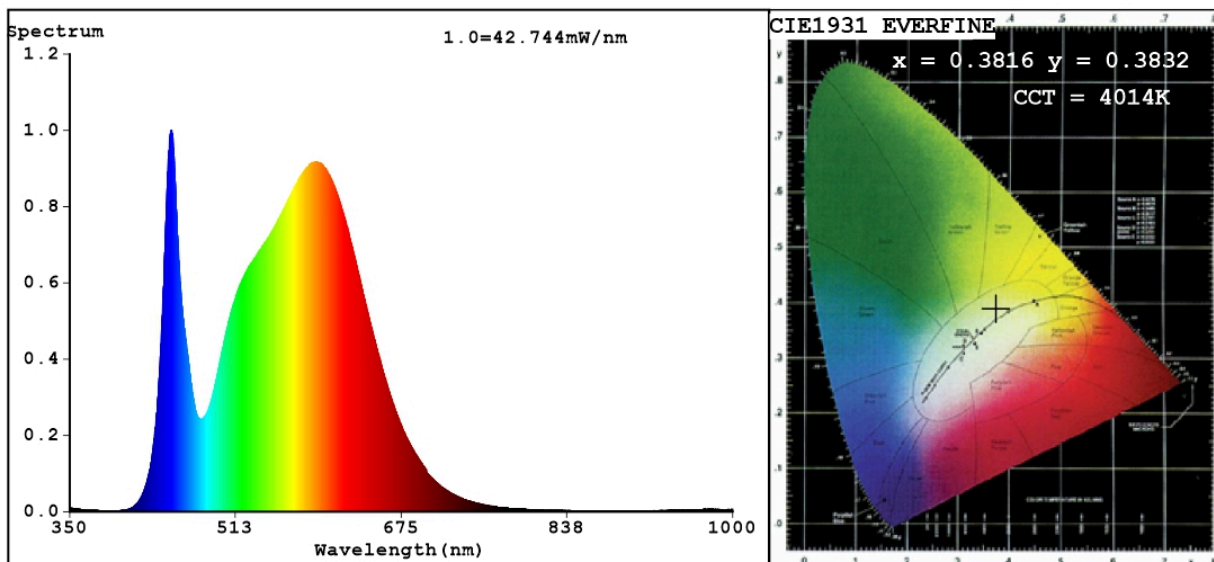

Color Parameters:

Chromaticity Coordinate: $x=0.3816$ $y=0.3832$ / $u'=0.2233$ $v'=0.5045$

CCT=4014K (Duv=0.0026) Dominant WL: $\lambda_d = 577.7\text{nm}$ Purity=29.5%

Ratio: R=17.8% G=78.8% B=3.4%; Peak WL: $\lambda_p = 449.9\text{nm}$ FWHM=21.2nm

Render Index: Ra=80.8

R1 =78	R2 =87	R3 =94	R4 =80	R5 =79	R6 =82	R7 =85
R8 =61	R9 =0	R10=69	R11=78	R12=58	R13=80	R14=97
						R15=71

Photo Parameters:

Flux = 2257 lm Eff. : 76.63 lm/W Fe = 6.725 W

Electrical parameters:

V = 229.87 V I = 0.1331 A P = 29.45 W PF = 0.9626

WHITE: ANSI_4000K

Status: Integral T = 20 ms Ip = 50483 (77%)

Model: SKY FIXTURES TLOM/30W
Tester: Petya Marinova
Temperature: 25.3Deg
Manufacturer: ELMARK

Number: 93TLOM3040/WH
Date: 2019-01-31 10:29
Humidity: 65.0%
Remarks: 018V039A_5167