

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 93TLR504WW/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	15	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 350 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	15,2	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-		If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,430 0,399
Parameters for directional light sources:				
Peak luminous intensity (cd)	599		Beam angle in degrees, or the range of beam angles that can be set	24
Parameters for LED and OLED light sources:				
R9 colour rendering index value	2		Survival factor	0,50
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50		Colour consistency in McAdam ellipses	0
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)		If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0		Stroboscopic effect metric (SVM)	0,0

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

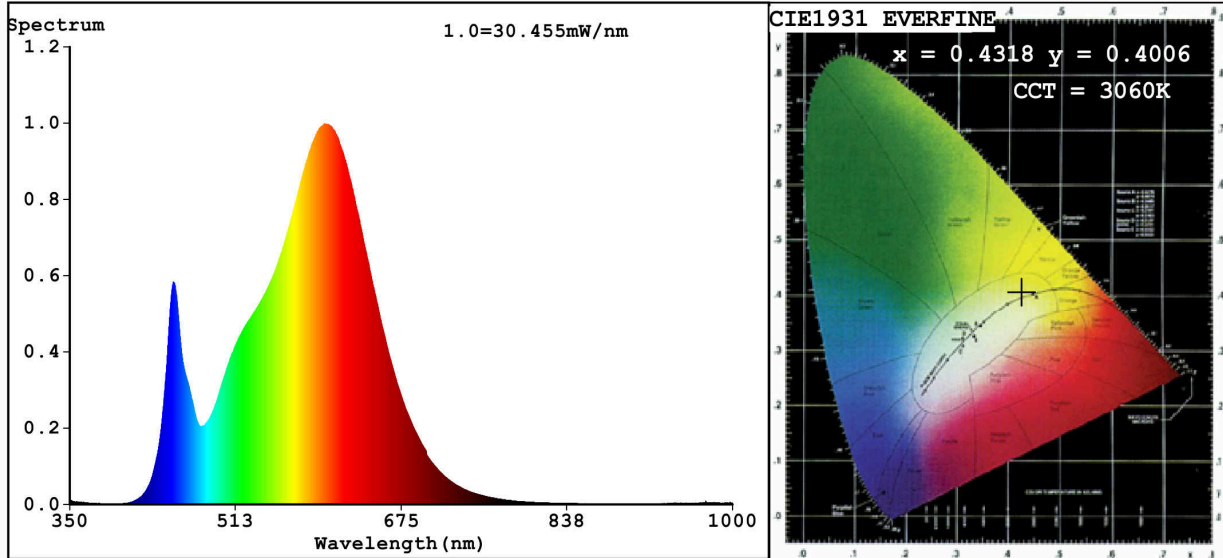

Color Parameters:

Chromaticity Coordinate: $x=0.4318$ $y=0.4006/u'=0.2487$ $v'=0.5193$
 CCT=3060K(Duv=-0.0007) Dominant WL:Ld =582.8nm WL:Lc = --nm Purity=49.9%
 Ratio:R=22.4% G=74.8% B=2.7%; Peak WL:Lp=599.8nm FWHM=124.3nm
 Render Index:Ra=81.6

R1 =80 R2 =91 R3 =95 R4 =79 R5 =81 R6 =89 R7 =81
 R8 =56 R9 =2 R10=80 R11=78 R12=71 R13=83 R14=98 R15=72

Photo Parameters:

Flux = 1487 lm Eff. : 98.34 lm/W Fe = 4.493 W

Electrical parameters:

V = 220.04 V I = 0.1350 A P = 15.12 W PF = 0.5089

WHITE:ANSI_3000K

Status: Integral T = 41 ms Ip = 44356 (68%)

Model:LED TRACK LIGHT
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:93TLR504WW
 Date:2020-07-30 09:37:34
 Humidity:65.0%
 Remarks:6855