

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 93ZFLD1240/BL

## Type of light source:

|   |                |                                 |     |
|---|----------------|---------------------------------|-----|
| Lighting technology used:                           | LED            | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | Integrated LED |                                 |     |
| Mains or non-mains:                                 | MLS            | Connected light source (CLS):   | Yes |
| Colour-tuneable light source:                       | No             | Envelope:                       | -   |
| High luminance light source:                        | Yes            |                                 |     |
| Anti-glare shield:                                  | No             | Dimmable:                       | No  |

## Product parameters

| Parameter  | Value                       | Parameter  | Value                  |
|--|-----------------------------|--|------------------------|
| <b>General product parameters:</b>   |                             |  |                        |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer  | 12                          | Energy efficiency class  | E                      |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 1 300 in Nar-row cone (90°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 4 000                  |
| On-mode power ( $P_{on}$ ), expressed in W   | 11,9                        | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal   | 0,20                   |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal  | 0,20                        | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set   | 82                     |
| Outer dimensions without separate control gear, lighting control   | Height                      | Spectral power distribution in the range 250 nm to 800 nm, at full-load  | See image in last page |
|  | Width                       |  |                        |
|  | Depth                       |  |                        |

|   |       |  |                |  |
|---|-------|--|----------------|--|
| parts and non-lighting control parts, if any (millimetre)   |       |  |                |  |
| Claim of equivalent power <sup>(a)</sup>  | -     | If yes, equivalent power (W)                                       | -              |  |
|   |       | Chromaticity coordinates (x and y)                                 | 0,379<br>0,380 |  |
| <b>Parameters for directional light sources:</b>  |       |  |                |  |
| Peak luminous intensity (cd)  | 1 356 | Beam angle in degrees, or the range of beam angles that can be set | 65             |  |
| <b>Parameters for LED and OLED light sources:</b>   |       |  |                |  |
| R9 colour rendering index value   | 1     | Survival factor  | 0,50           |  |
| the lumen maintenance factor  | 0,95  |  |                |  |
| <b>Parameters for LED and OLED mains light sources:</b>   |       |  |                |  |
| displacement factor (cos $\phi_1$ )   | 0,50  | Colour consistency in McAdam ellipses                              | 4              |  |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b)  | If yes then replacement claim (W)                                  | -              |  |
| Flicker metric (Pst LM)   | 0,5   | Stroboscopic effect metric (SVM)                                   | 0,2            |  |

(a) - : not applicable;

(b) - : not applicable;

## Lightsource Test Report

### Product Information

Product Number: 20

### CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.3791$   $y=0.3801$   $u(u')=0.2229$   $v=0.3352$   $v'=0.5028$

CCT:  $T_c=4061K$  ( $duv=0.00195$ )

Color Ratio:  $R=0.178$   $G=0.786$   $B=0.036$

Peak Wavelength: 448nm

Half Bandwidth: 24.5nm

Dominant Wavelength: 577.8nm

Color Purity: 0.278

CRI:  $R_i$ :  $R_a=82.0$

$R_1=79$

$R_2=88$

$R_3=95$

$R_4=82$

$R_5=81$

$R_6=84$

$R_7=85$

$R_8=62$

$R_9=1$

$R_{10}=72$



$R_{11}=81$

$R_{12}=65$

$R_{13}=81$

$R_{14}=97$

$R_{15}=73$

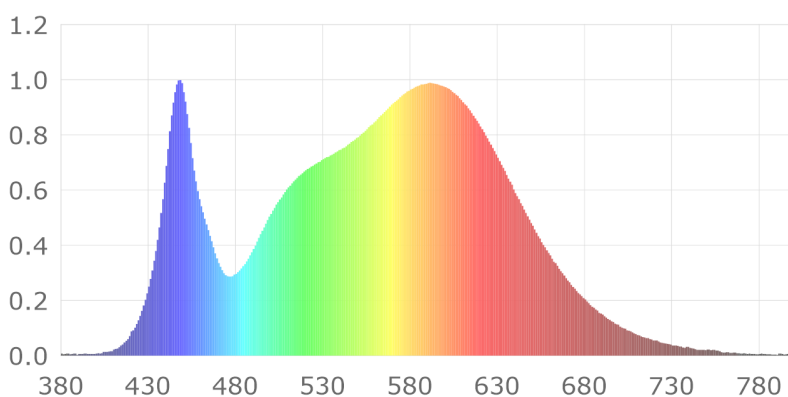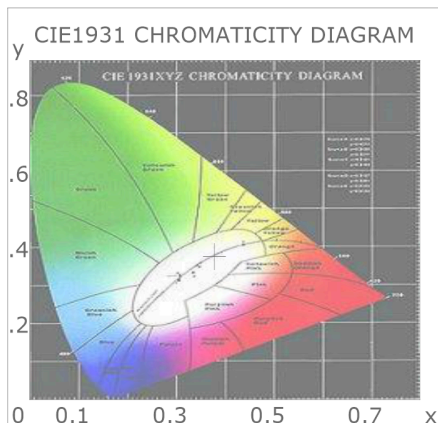

### Photometric Parameters

Luminous Flux: 1268.6 lm

Efficiency: 106.60 lm/W

Radiant Power: 3.796 W

### Electric Parameters

Voltage: 220.60V

Current: 0.0950A

Power: 11.90W

Power Factor: 0.5650

Frequency: 50.00Hz

#### Test Information

Scan Range: 380nm~800nm:1nm

Stabilization Time: 6 Sec

Max of Signal: 43590 (3173)

Photometric Method:

Photometric Condition: Sphere diameter: 1.50m, 4 $\pi$

CCD Integration Time: 757.93 ms

Condition:  $T_x=26.4^\circ C$ ,  $T_i=25.6^\circ C$

Test Lab:

Operator:

Test Device: Inventfine CMS-2S (Plus)

Test Time: 2022-03-31 19:57:59

Inspector: