

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 93ZFLD6040/BL

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	60	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	5 300 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	58,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,20
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0,20	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	820	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	33	
	Depth	66	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,380 0,381
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	6 739	Beam angle in degrees, or the range of beam angles that can be set	50
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	1	Survival factor	0,50
the lumen maintenance factor	0,95		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	4
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,5	Stroboscopic effect metric (SVM)	0,2

(a) '-': not applicable;

(b) '-': not applicable;

# Lightsource Test Report

## Product Information


Product Number: 29

## CIE Colorimetric Parameters

Chromaticity coordinates:  $x=0.3801$   $y=0.3815$   $u(u')=0.2230$   $v=0.3357$   $v'(v')=0.5036$   
 CCT:  $T_c=4044K$  ( $duv=0.00229$ ) Color Ratio:  $R=0.180$   $G=0.779$   $B=0.042$   
 Peak Wavelength: 454nm Half Bandwidth: 26.8nm  
 Dominant Wavelength: 577.7nm Color Purity: 0.286

CRI:  $R_i$ :  $R_a=82.5$

R1 =81	R2 =91	R3 =95	R4 =79	R5 =81	R6 =89	R7 =83	R8 =60
R9 =1	R10=80	R11=78	R12=63	R13=84	R14=98	R15=73	

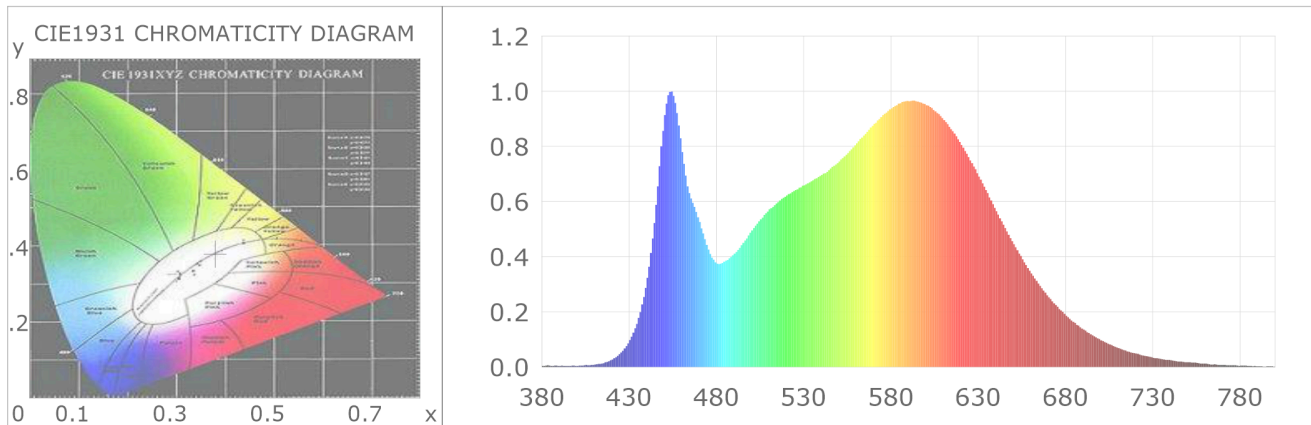

## Photometric Parameters

Luminous Flux: 5674.5 lm Efficiency: 97.00 lm/W Radiant Power: 16.924 W

## Electric Parameters

Voltage: 220.60V Current: 0.4960A Power: 58.50W  
 Power Factor: 0.5330 Frequency: 50.00Hz

### Test Information

Scan Range: 380nm~800nm:1nm	Photometric Method:
Stabilization Time: 6 Sec	Photometric Condition: Sphere diameter: 1.50m, 4T
Max of Signal: 45528 (2916)	CCD Integration Time: 175.59 ms

Condition: Tx:27.1'C, Ti:25.8'C  
 Test Lab:  
 Operator:

Test Device: Inventfine CMS-2S (Plus)  
 Test Time: 2022-03-31 20:17:23  
 Inspector: