

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: STELLAR

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 955AZZAR72

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	72	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	6 300 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	76,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,436 0,402	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	4	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	5	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

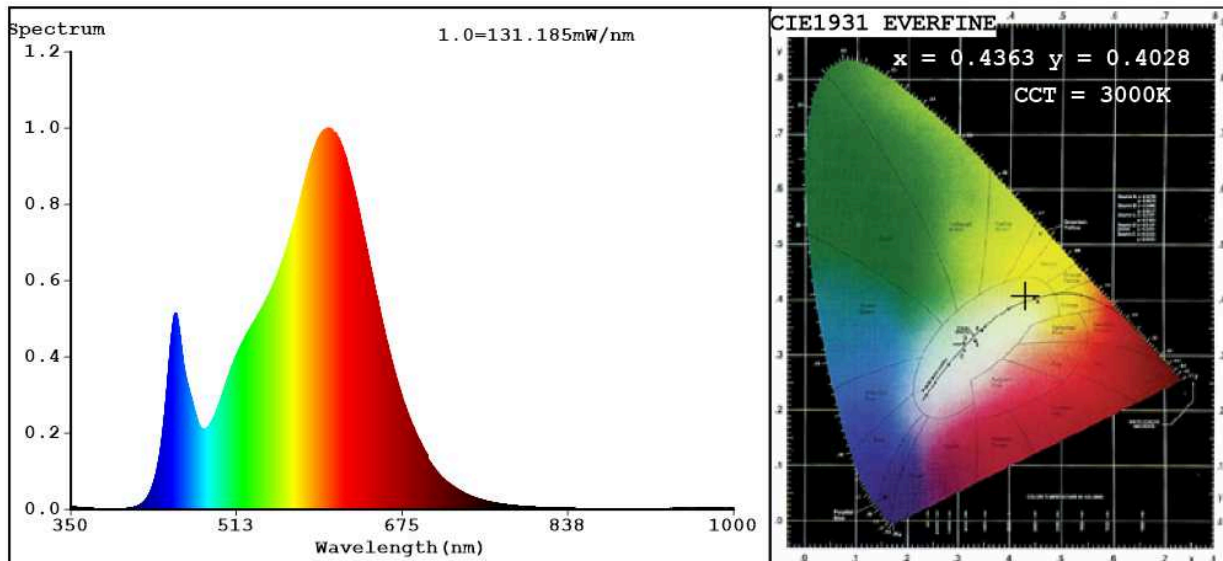

Color Parameters:

Chromaticity Coordinate: $x=0.4363$ $y=0.4028$ $u'=0.2507$ $v'=0.5208$
 CCT=3000K(Duv=-0.0004) Dominant WL:Ld =583.0nm WL:Lc = --nm Purity=51.9%
 Ratio:R=22.9% G=74.4% B=2.7%; Peak WL:Lp=603.5nm FWHM=123.6nm
 Render Index:Ra=82.1 AvgR=76.5 TM30:Rf=84 Rg=95 Lav=588.7nm

R1 =81	R2 =92	R3 =95	R4 =80	R5 =81	R6 =90	R7 =82
R8 =57	R9 =4	R10=81	R11=79	R12=72	R13=83	R14=98 R15=73

Photo Parameters:

Flux = 6348 lm Eff. : 82.45 lm/W Fe = 19.22 W

Electrical parameters:

V = 225.14 V I = 0.4172 A P = 76.99 W PF = 0.8197

WHITE:ANSI_3000K

Status: Integral T = 9 ms Ip = 52355 (80%)

Model:CHANDELIER
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:955AZZAR72
 Date:2021-12-20 14:52:57
 Humidity:65.0%
 Remarks: