

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 955CAMEO30

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	30	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 000 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	33,7	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	85
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,433 0,403	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	18	Survival factor	0,50	
the lumen maintenance factor	0,90			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	2	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

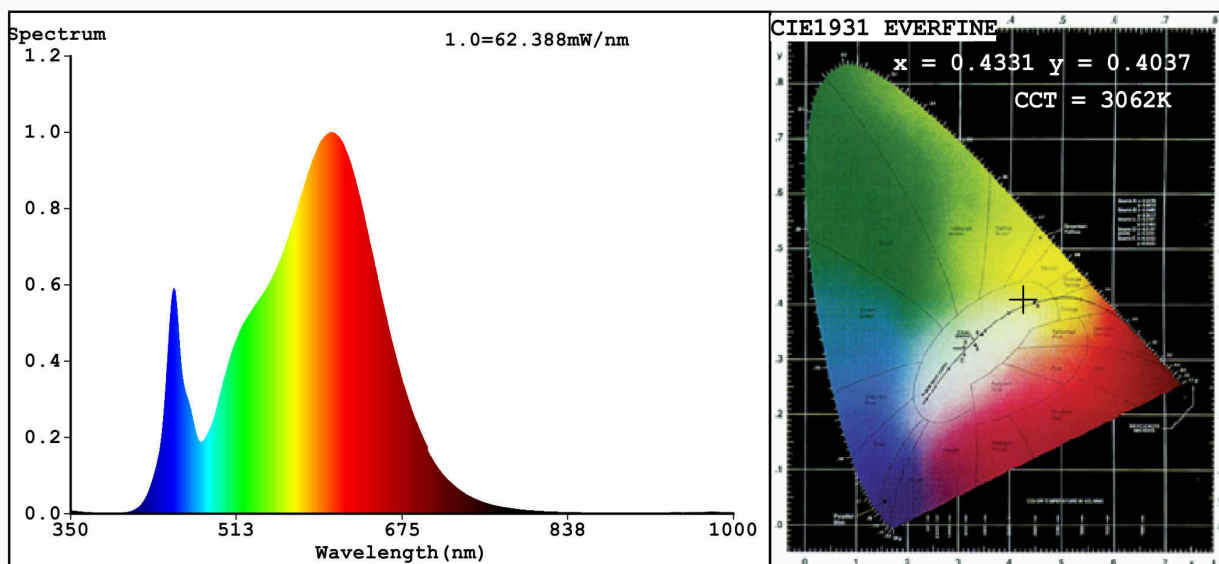

Color Parameters:

Chromaticity Coordinate: $x=0.4331$ $y=0.4037$ $u'=0.2483$ $v'=0.5207$

CCT=3062K(Duv=0.0004) Dominant WL:Ld =582.4nm Purity=51.2%

Ratio:R=22.8% G=74.6% B=2.6%; Peak WL:Lp=605.8nm FWHM=140.6nm

Render Index:Ra=85.1

R1 =84	R2 =92	R3 =97	R4 =84	R5 =84	R6 =90	R7 =85
R8 =65	R9 =18	R10=81	R11=84	R12=73	R13=86	R14=99
						R15=77

Photo Parameters:

Flux = 3134 lm Eff. : 92.77 lm/W Fe = 9.719 W

Electrical parameters:

V = 229.84 V I = 0.2792 A P = 33.79 W PF = 0.5266

WHITE:ANSI_3000K

Status: Integral T = 16 ms Ip = 50301 (77%)

Model:LED ceiling lamp/6x5W
Tester:Petya Marinova
Temperature:25.3Deg
Manufacturer:ELMARK

Number:955CAMEO30
Date:2017-11-02 11:33
Humidity:65.0%
Remarks:INNO170919-039_4104