

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 955FELIX3058

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	50	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	3 000 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	49,7	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	81
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,451 0,413	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	2	Survival factor	0,50	
the lumen maintenance factor	0,95			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

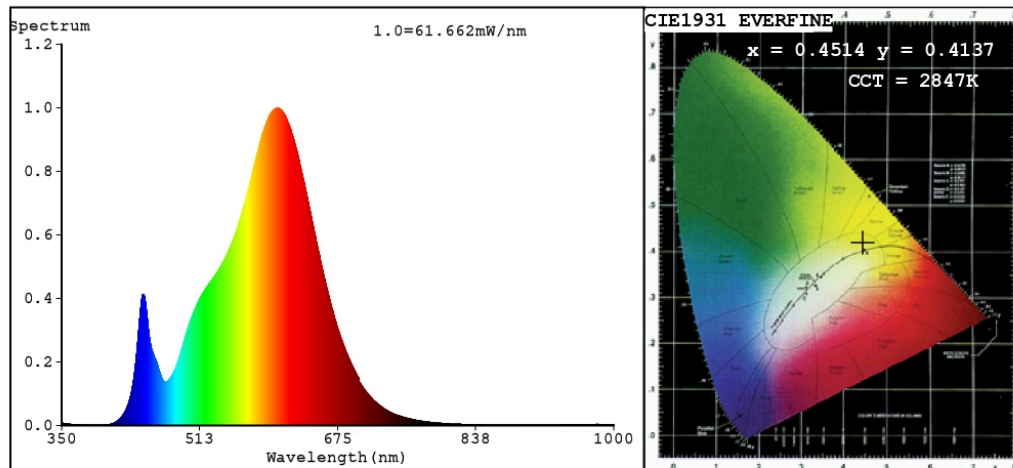

Color Parameters:

Chromaticity Coordinate: $x=0.4514$ $y=0.4137$ $u'=0.2557$ $v'=0.5273$
 CCT=2847K (Duv=0.0020) Dominant WL:Ld =582.9nm WL:Lc = --nm Purity=59.7%
 Ratio:R=23.7% G=74.0% B=2.3%; Peak WL:Lp=603.1nm FWHM=119.3nm
 Render Index:Ra=81.8

R1 =80	R2 =90	R3 =97	R4 =81	R5 =80	R6 =89	R7 =82
R8 =56	R9 =2	R10=78	R11=81	R12=74	R13=82	R14=99 R15=71

Photo Parameters:

Flux = 2914 lm Eff. : 58.55 lm/W Fe = 8.785 W

Electrical parameters:

V = 229.73 V I = 0.2234 A P = 49.78 W PF = 0.9700
 WHITE:ANSI_2700K

~~Status: Integral T = 15 ms Ip = 45318 (69%)~~

Model:LED PENDANT LAMP
 Tester:Atanas DAKOV
 Temperature:25.3Deg
 Manufacturer:ELMARK

Number:955FELIX3058
 Date:2022-11-23 14:11:30
 Humidity:65.0%
 Remarks:8911