## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 955FRANCIS42/14


_	•		
Typa	Λt	liaht	source:
IVDE	VI.	IIKIIL	source.

Type of light source.			
Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	Integrated LED		
(or other electric interface)			
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No
	Product para	meters	
Parameter	Value	Parameter	Value
	General product r	parameters:	1

Product parameters							
Parameter		Value	Parameter	Value			
General product parameters:							
<u> </u>	nption in on- 00 h), rounded st integer	16	Energy efficiency class	F			
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		1 440 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000			
On-mode power (P <sub>on</sub> ), expressed in W		16,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00			
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80			
Outer dimen-	Height	1 360	Spectral power dis-	See image			
sions without	Width	150	tribution in the	in last page			
separate con- trol gear, light- ing control	Depth	1 000	range 250 nm to 800 nm, at full-load				

parts and non- lighting con- trol parts, if any (millime- tre)					
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-		
		Chromaticity coordinates (x and y)	0,372 0,363		
Parameters for LED and OLED light sources:					
R9 colour rendering index value	0	Survival factor	1,00		
the lumen maintenance factor	0,95				
Parameters for LED and OLED mains light sources:					
displacement factor (cos φ1)	0,50	Colour consistency in McAdam ellipses	4		
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-		
Flicker metric (Pst LM)	0,6	Stroboscopic effect metric (SVM)	0,4		

(a)'-': not applicable; (b)'-': not applicable;

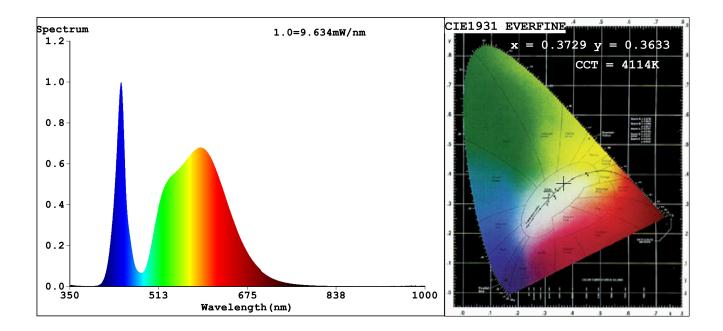

Model placed on the Union market from 05/12/2022.



**EPREL registration number:** 1258880 https://eprel.ec.europa.eu/qr/12

58880

Supplier: ELMARK INDUSTRIES SC (Importer) Website: www.elmarkholding.eu

**Customer care service:** 

Name: ELMARK INDUSTRIES SC Website: www.elmarkholding.eu

Email: eelabels@elmarkholding.eu Phone: +35952575545

Address:

bul.Dobrudja 2 9300 Dobrich Bulgaria