

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 955LINUS1P

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	23	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 750 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	24,6	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	86
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,429 0,389	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	23	Survival factor	0,00	
the lumen maintenance factor	0,00			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) : not applicable;

(b) : not applicable;

## Spectrum Test Report

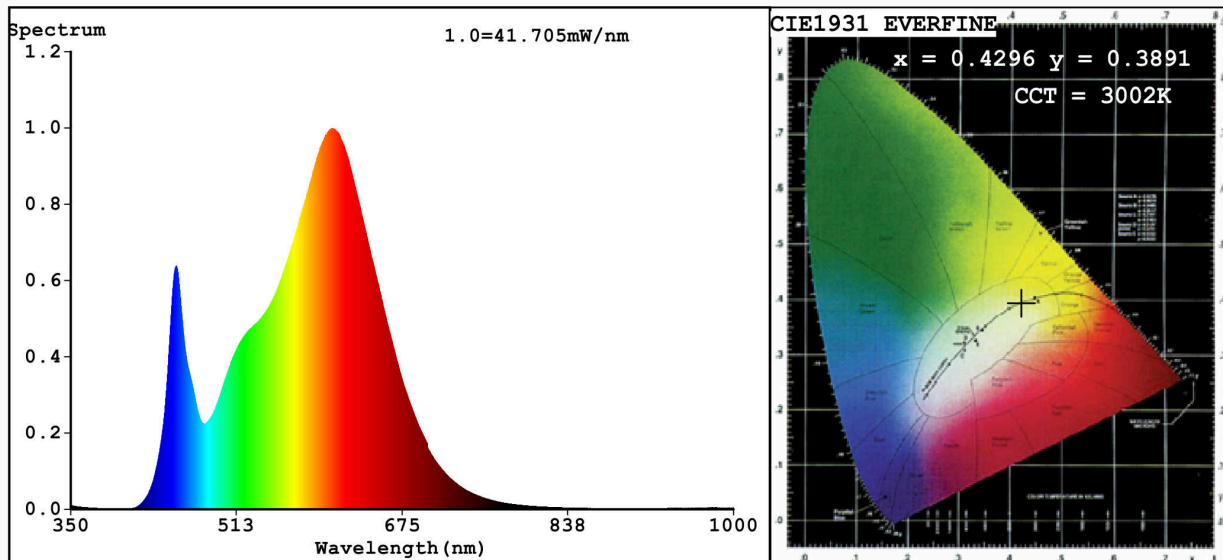

### Color Parameters:

Chromaticity Coordinate:  $x=0.4296$   $y=0.3891$   $u'=0.2523$   $v'=0.5142$   
 CCT=3002K (Duv=-0.0051) Dominant WL:Ld =584.8nm WL:Lc = --nm Purity=45.7%  
 Ratio:R=23.9% G=73.0% B=3.0%; Peak WL:Lp=606.1nm FWHM=123.5nm  
 Render Index:Ra=86.1

R1 =87	R2 =96	R3 =93	R4 =85	R5 =88	R6 =94	R7 =82
R8 =64	R9 =23	R10=91	R11=85	R12=80	R13=90	R14=97 R15=80

### Photo Parameters:

Flux = 1968 lm Eff. : 79.77 lm/W Fe = 6.303 W

### Electrical parameters:

V = 219.95 V I = 0.1159 A P = 24.67 W PF = 0.9679

WHITE:ANSI\_3000K

Status: Integral T = 34 ms Ip = 50355 (77%)

Model:CHANDELIER  
 Tester:Atanas DAKOV  
 Temperature:25.3Deg  
 Manufacturer:ELMARK

Number:955LINUS1P1  
 Date:2020-07-28 13:34:55  
 Humidity:65.0%  
 Remarks:6716