

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 955TRITON7

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	570 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	5,8	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,372 0,378	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	450	Beam angle in degrees, or the range of beam angles that can be set	30	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	5	Survival factor	0,00	
the lumen maintenance factor	0,00			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,43	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

## Spectrum Test Report

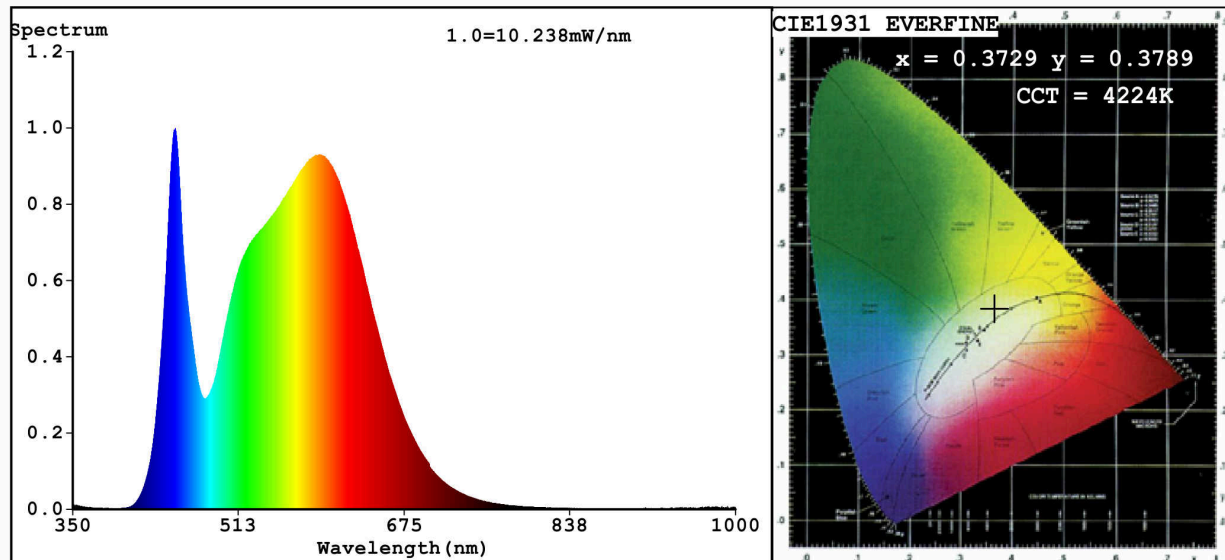

### Color Parameters:

Chromaticity Coordinate:  $x=0.3729$   $y=0.3789$  /  $u'=0.2193$   $v'=0.5014$   
 $CCT=4224K$  (Duv=0.0033) Dominant WL:  $L_d = 576.3nm$  WL:  $L_c = --nm$  Purity=25.6%  
 Ratio: R=17.3% G=79.0% B=3.7% ; Peak WL:  $L_p = 450.6nm$  FWHM=25.7nm  
 Render Index:  $R_a = 82.4$

R1 =80	R2 =88	R3 =94	R4 =82	R5 =80	R6 =83	R7 =87
R8 =65	R9 =5	R10=71	R11=81	R12=61	R13=82	R14=97
						R15=74

### Photo Parameters:

Flux = 567.9 lm Eff. : 96.47 lm/W  $\Phi_e = 1.719 W$

### Electrical parameters:

V = 220.03 V I = 0.06091 A P = 5.887 W PF = 0.4392

WHITE: ANSI\_4000K

Status: Integral T = 129 ms  $I_p = 47342$  (72%)

Model: LED BATH LIGHT  
 Tester: Atanas DAKOV  
 Temperature: 25.3Deg  
 Manufacturer: ELMARK

Number: 955TRITON7  
 Date: 2020-01-02 15:57:17  
 Humidity: 65.0%  
 Remarks: 6127