

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 95BRLED12BL

**Type of light source:**

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 200 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	11,4	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,386 0,391	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	8	Survival factor	0,50	
the lumen maintenance factor	0,93			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	0	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) : not applicable;

(b) : not applicable;

## Spectrum Test Report

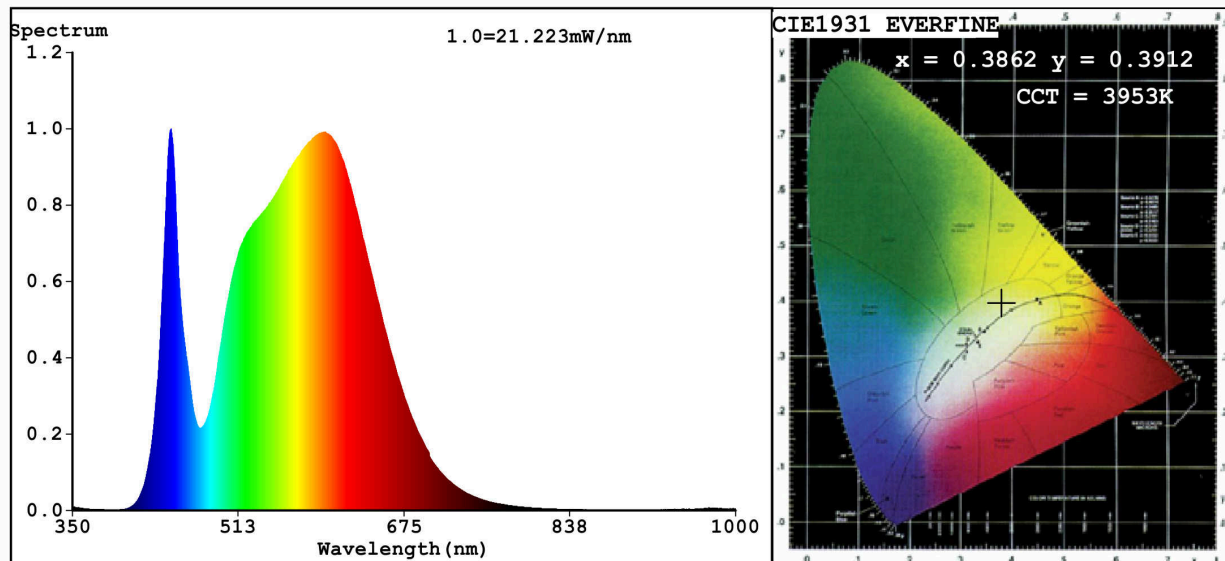

### Color Parameters:

Chromaticity Coordinate:  $x=0.3862$   $y=0.3912$   $u'=0.2232$   $v'=0.5086$   
 CCT=3953K (Duv=0.0050) Dominant WL:  $\lambda_d = 576.9\text{nm}$  WL:  $\lambda_c = \text{--nm}$  Purity=33.3%  
 Ratio: R=18.1% G=78.8% B=3.1%; Peak WL:  $\lambda_p = 446.6\text{nm}$  FWHM=20.8nm  
 Render Index:  $R_a = 82.3$

R1 =80	R2 =86	R3 =93	R4 =83	R5 =80	R6 =82	R7 =88
R8 =66	R9 =8	R10=68	R11=83	R12=63	R13=81	R14=96
						R15=73

### Photo Parameters:

Flux = 1253 lm Eff. : 109.61 lm/W  $\Phi_e = 3.782\text{ W}$

### Electrical parameters:

V = 220.15 V I = 0.09540 A P = 11.43 W PF = 0.5443

WHITE: ANSI\_4000K

Status: Integral T = 49 ms  $I_p = 52925$  (81%)

Model: LED BULKHEAD LAMP  
 Tester: Atanas DAKOV  
 Temperature: 25.3Deg  
 Manufacturer: ELMARK

Number: 95BRLED12WH  
 Date: 2020-04-15 14:04:55  
 Humidity: 65.0%  
 Remarks: 6406