

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 95EL229118W/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 300 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	17,8	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,387 0,386	
Parameters for directional light sources:				
Peak luminous intensity (cd)	438	Beam angle in degrees, or the range of beam angles that can be set	116	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	10	Survival factor	0,50	
the lumen maintenance factor	0,95			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,2	Stroboscopic effect metric (SVM)	0,2	

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

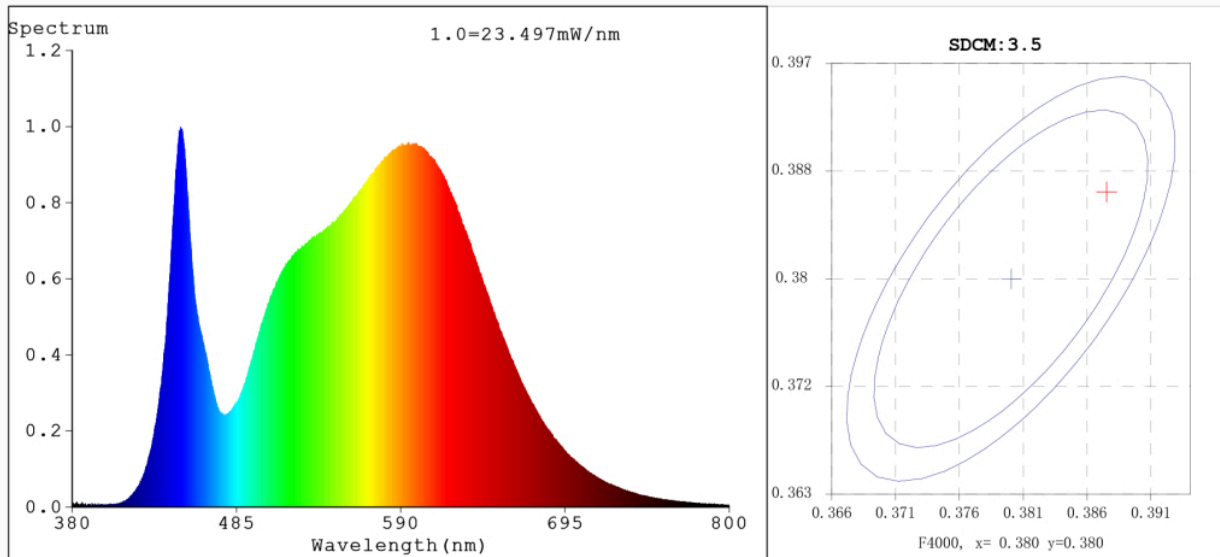

Color Parameters:

Chromaticity Coordinate: $x=0.3875$ $y=0.3868$ / $u'=0.2257$ $v'=0.5070$
CCT=3890K (Duv=0.0026) Dominant WL:Ld =578.2nm WL:Lc = --nm Purity=32.4%
Ratio:R=18.6% G=78.1% B=3.3% Peak WL:Lp=449.3nm FWHM=19.9nm
Render Index:Ra=83.4 AvgR=76.7 TM30:Rf=85 Rg=96

Eff (PPF)=1.00235

R1 =81 R2 =88 R3 =95 R4 =83 R5 =82 R6 =85 R7 =87
R8 =65 R9 =10 R10=73 R11=83 R12=63 R13=83 R14=97 R15=75

Photo Parameters:

Flux = 1300 lm Eff. : 72.67 lm/W Fe = 3.914 W

Electrical parameters:

V = 228.82 V I = 0.1488 A P = 17.89 W PF = 0.5256

LEVEL:OUT WHITE:ANSI_4000K

Status: Integral T = 787 ms Ip = 35173 (54%)

GBT5702