

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 95EL229128W/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	28	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 113 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	28,9	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, lighting control	Height	380	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	55	
	Depth	55	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,383 0,382
Parameters for directional light sources:			
Peak luminous intensity (cd)	724	Beam angle in degrees, or the range of beam angles that can be set	116
Parameters for LED and OLED light sources:			
R9 colour rendering index value	7	Survival factor	0,50
the lumen maintenance factor	0,95		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

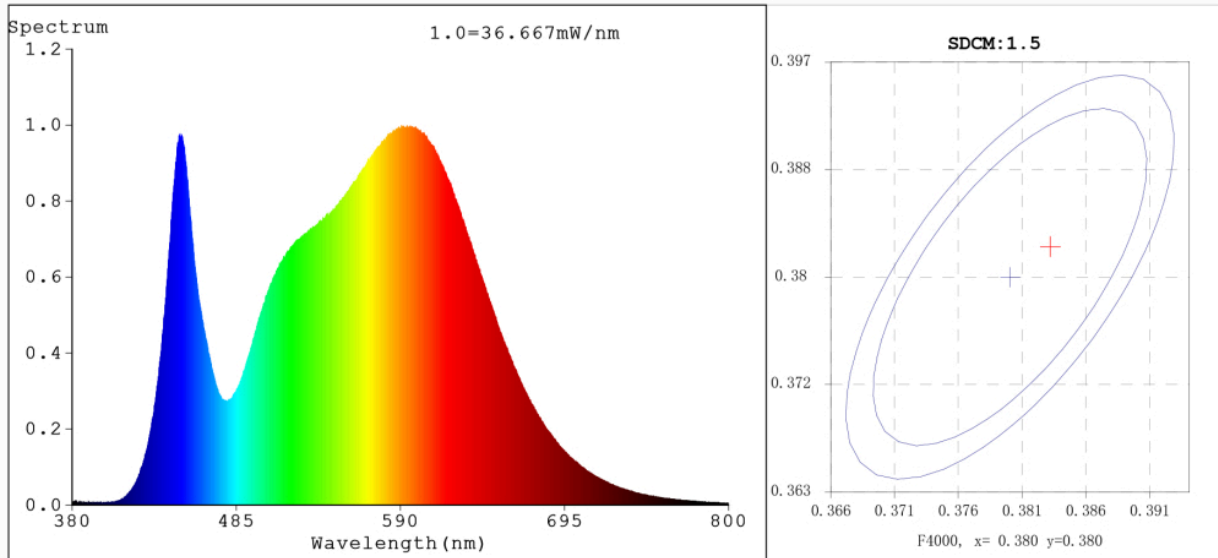

Color Parameters:

Chromaticity Coordinate: $x=0.3832$ $y=0.3824$ / $u'=0.2247$ $v'=0.5045$
 CCT=3968K (Duv=0.0018) Dominant WL:Ld =578.3nm WL:Lc = --nm Purity=29.8%
 Ratio:R=18.3% G=78.2% B=3.5% Peak WL:Lp=590.6nm FWHM=150.3nm
 Render Index:Ra=83.0 AvgR=76.4 TM30:Rf=85 Rg=95

Eff (PPF)=1.00681

R1 =81 R2 =89 R3 =95 R4 =83 R5 =81 R6 =85 R7 =86
 R8 =64 R9 =7 R10=73 R11=82 R12=64 R13=83 R14=97 R15=74

Photo Parameters:

Flux = 2113 lm Eff. : 73.08 lm/W Fe = 6.365 W

Electrical parameters:

V = 228.81 V I = 0.2492 A P = 28.91 W PF = 0.5071
 LEVEL:OUT WHITE:ANSI_4000K
 Status: Integral T = 677 ms Ip = 49337 (75%)

GBT5702