

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 95IP4414

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	700 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	7,7	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,436 0,399	
Parameters for directional light sources:				
Peak luminous intensity (cd)	604	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	6	Survival factor	0,50	
the lumen maintenance factor	0,93			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	1	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,4	Stroboscopic effect metric (SVM)	0,6	

(a) - : not applicable;

(b) - : not applicable;

Spectrum Test Report

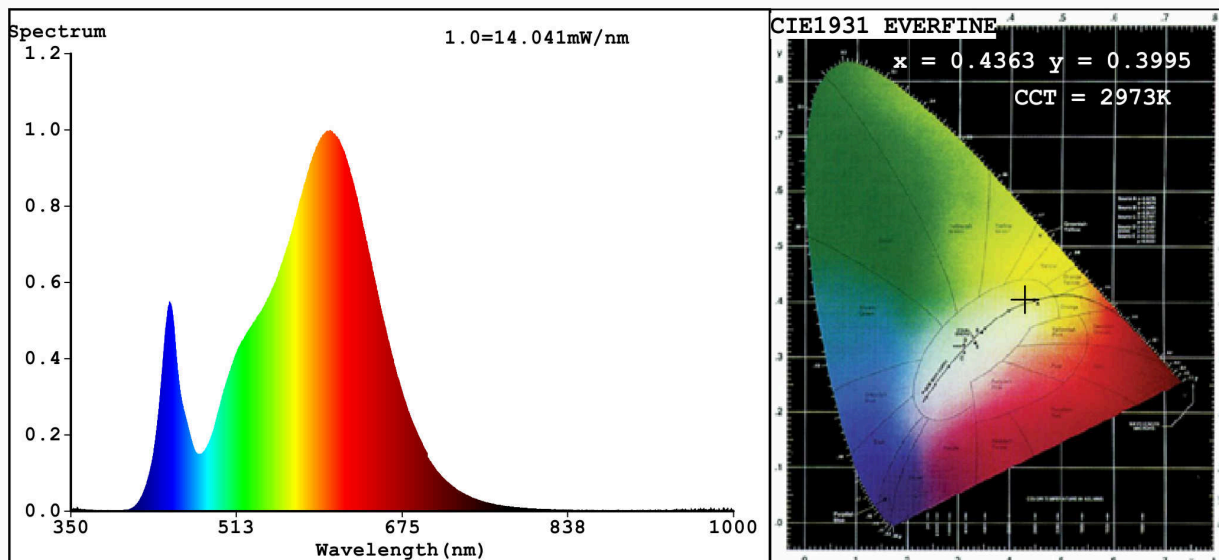

Color Parameters:

Chromaticity Coordinate: $x=0.4363$ $y=0.3995$ $u'=0.2521$ $v'=0.5195$

CCT=2973K(Duv=-0.0017) Dominant WL:Ld =583.6nm Purity=50.9%

Ratio:R=23.1% G=74.5% B=2.4%; Peak WL:Lp=604.4nm FWHM=126.7nm

Render Index:Ra=82.3

R1 =81	R2 =90	R3 =96	R4 =81	R5 =81	R6 =88	R7 =82
R8 =59	R9 =6	R10=77	R11=81	R12=74	R13=83	R14=98
						R15=73

Photo Parameters:

Flux = 679.2 lm Eff. : 81.45 lm/W Fe = 2.081 W

Electrical parameters:

V = 229.95 V I = 0.06738 A P = 8.339 W PF = 0.5382

WHITE:ANSI_3000K

Status: Integral T = 61 ms Ip = 44027 (67%)

Model:LED MIRROR LIGHT/8W
Tester:Petya Marinova
Temperature:25.3Deg
Manufacturer:ELMARK

Number:95IP4414
Date:2017-07-20 12:56
Humidity:65.0%
Remarks:017V009B_3790