

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 95MALIA12LED/BL

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	Yes		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	600 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	12,4	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	120	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	130	
	Depth	120	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,377 0,375
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	9	Survival factor	0,50
the lumen maintenance factor	0,93		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,26	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a)-: not applicable;

(b)-: not applicable;

**Spectrum Test Report**

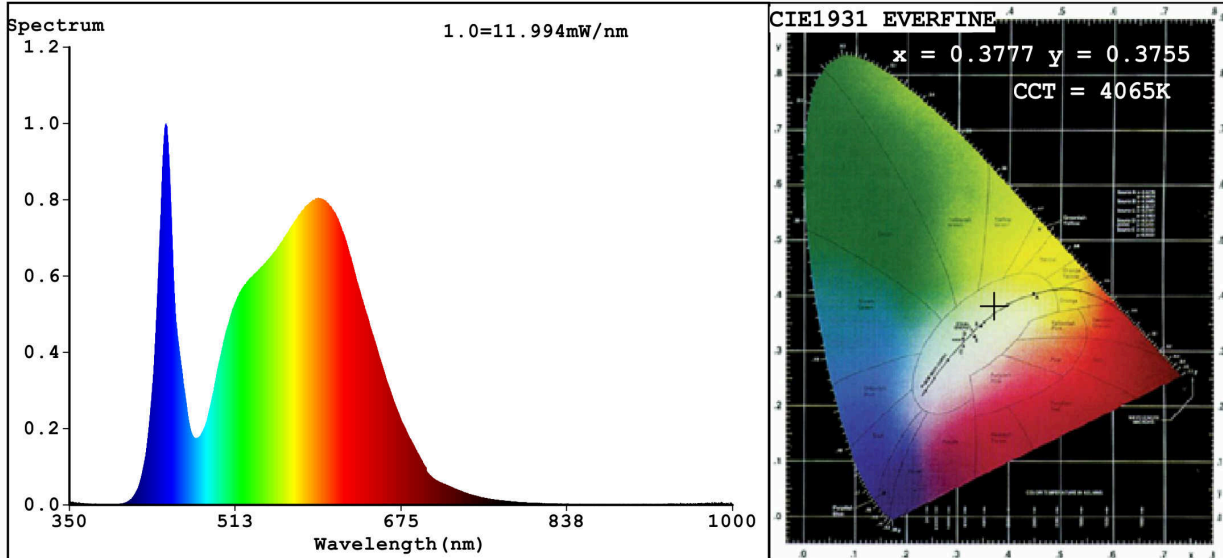

**Color Parameters:**

Chromaticity Coordinate:  $x=0.3777$   $y=0.3755$   $u'=0.2238$   $v'=0.5006$   
 CCT=4065K (Duv=0.0002) Dominant WL:Ld =578.7nm WL:Lc = --nm Purity=26.1%  
 Ratio:R=18.1% G=78.7% B=3.3%; Peak WL:Lp=444.5nm FWHM=18.6nm  
 Render Index:Ra=82.3 AvgR=75.9 TM30:Rf=83 Rg=98 Lav=568.0nm

R1 =81    R2 =86    R3 =92    R4 =84    R5 =82    R6 =82    R7 =86  
 R8 =66    R9 =9    R10=69    R11=84    R12=66    R13=82    R14=95    R15=75

**Photo Parameters:**

Flux = 565.4 lm    Eff. : 45.53 lm/W    Fe = 1.732 W

**Electrical parameters:**

V = 225.23 V    I = 0.2073 A    P = 12.42 W PF = 0.2659  
 WHITE:ANSI\_4000K

Status: Integral T = 103 ms    Ip = 50714 (77%)

Model:LED FIXTURES  
 Tester:Atanas DAKOV  
 Temperature:25.3Deg  
 Manufacturer:ELMARK

Number:95MALIA12LED BL  
 Date:2021-08-03 10:40:05  
 Humidity:65.0%  
 Remarks:7669