

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ELMARK

Supplier's address: ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

Model identifier: 95MALIA24LED/WH

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	24	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	1 320 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P_{on}), expressed in W	24,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,376 0,375	
Parameters for directional light sources:				
Peak luminous intensity (cd)	446	Beam angle in degrees, or the range of beam angles that can be set	120	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	9	Survival factor	0,50	
the lumen maintenance factor	0,90			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ 1)	0,30	Colour consistency in McAdam ellipses	3	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

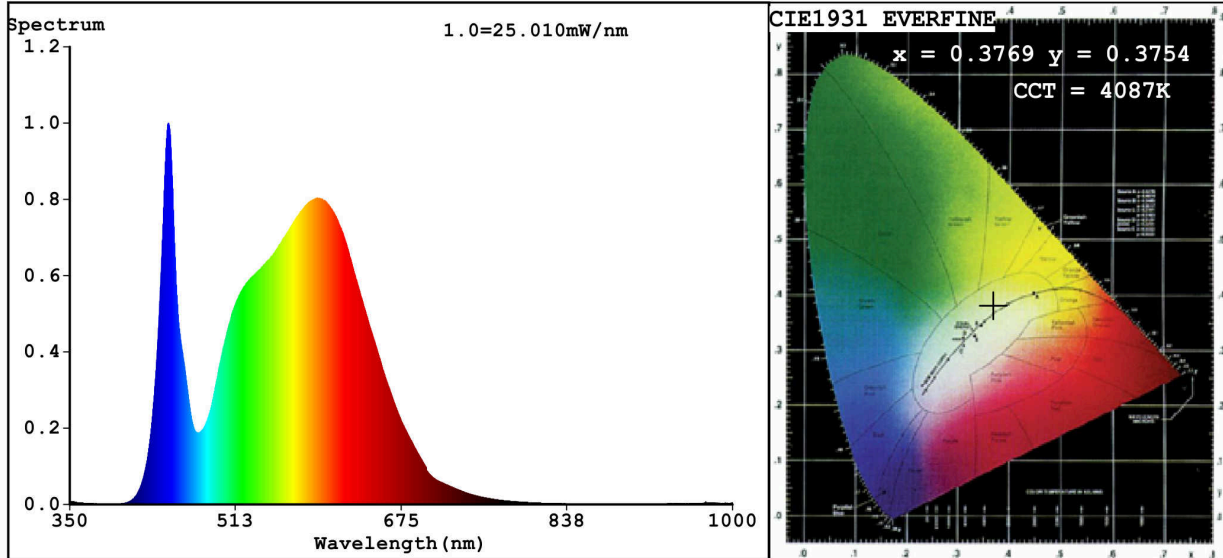

Color Parameters:

Chromaticity Coordinate: $x=0.3769$ $y=0.3754$ / $u'=0.2234$ $v'=0.5004$
 CCT=4087K (Duv=0.0004) Dominant WL: $L_d = 578.5\text{nm}$ WL: $L_c = \text{--nm}$ Purity=25.8%
 Ratio: R=18.0% G=78.7% B=3.3% ; Peak WL: $L_p = 446.8\text{nm}$ FWHM=18.7nm
 Render Index: $R_a = 82.4$ AvgR=75.8 TM30: $R_f = 83$ $R_g = 97$ $L_{av} = 568.0\text{nm}$

R1 =81 R2 =87 R3 =92 R4 =83 R5 =81 R6 =83 R7 =86
 R8 =66 R9 =9 R10=70 R11=83 R12=64 R13=82 R14=96 R15=75

Photo Parameters:

Flux = 1178 lm Eff. : 53.77 lm/W $F_e = 3.599$ W

Electrical parameters:

V = 225.09 V I = 0.2740 A P = 21.92 W PF = 0.3554
 WHITE: ANSI_4000K

Status: Integral T = 48 ms $I_p = 48311$ (74%)

Model: LED FIXTURES
 Tester: Atanas DAKOV
 Temperature: 25.3Deg
 Manufacturer: ELMARK

Number: 95MALIA24LED/BL
 Date: 2021-07-05 09:16:20
 Humidity: 65.0%
 Remarks: