

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ELMARK

**Supplier's address:** ELMARK INDUSTRIES SC, bul.Dobrudja 2, 9300 Dobrich Dobrich, BG

**Model identifier:** 95SHELLY18LED/GR

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Integrated LED		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 300 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 000 or 5 500
On-mode power ( $P_{on}$ ), expressed in W	27,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,80
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0,50	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	79
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)			range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,450 0,411	
<b>Parameters for directional light sources:</b>				
Peak luminous intensity (cd)	601	Beam angle in degrees, or the range of beam angles that can be set	120	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	13	Survival factor	0,40	
the lumen maintenance factor	0,90			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	1	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0	

(a) - : not applicable;

(b) - : not applicable;

## Spectrum Test Report

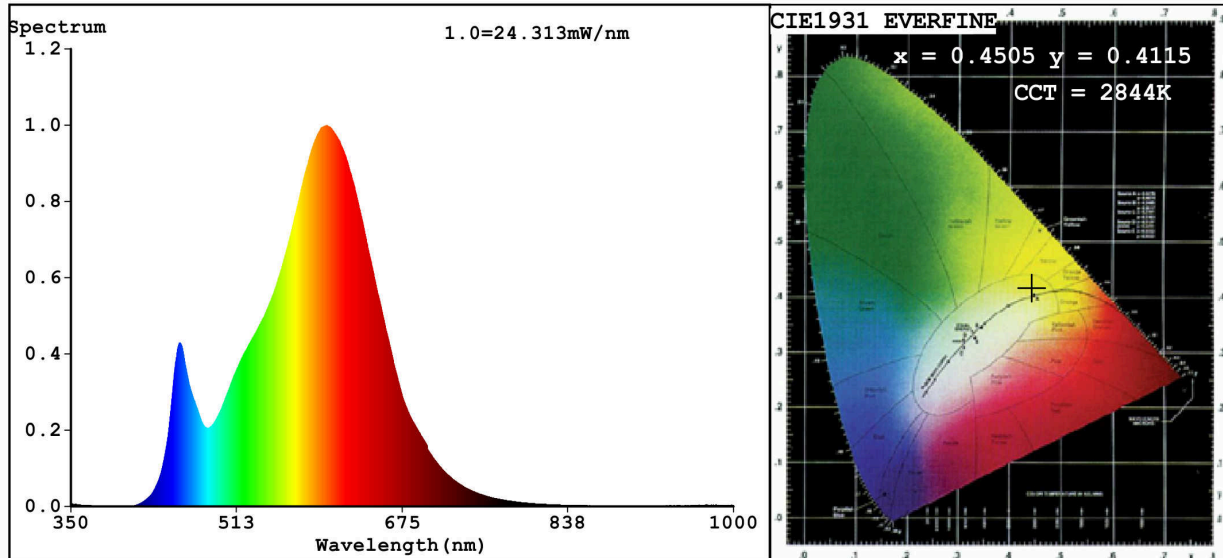

### Color Parameters:

Chromaticity Coordinate:  $x=0.4505$   $y=0.4115$   $u'=0.2561$   $v'=0.5263$   
 CCT=2844K (Duv=0.0012) Dominant WL:Ld =583.1nm WL:Lc = --nm Purity=58.7%  
 Ratio:R=23.5% G=74.0% B=2.5%; Peak WL:Lp=601.1nm FWHM=116.6nm  
 Render Index:Ra=79.8

R1 =78	R2 =91	R3 =94	R4 =75	R5 =78	R6 =89	R7 =80
R8 =53	R9 =0	R10=79	R11=73	R12=69	R13=81	R14=97
						R15=70

### Photo Parameters:

Flux = 1147 lm Eff. : 42.29 lm/W Fe = 3.465 W

### Electrical parameters:

V = 219.97 V I = 0.2348 A P = 27.12 W PF = 0.5251

WHITE:ANSI\_2700K

Status: Integral T = 32 ms Ip = 38549 (59%)

Model:CEILING LAMP  
 Tester:Atanas DAKOV  
 Temperature:25.3Deg  
 Manufacturer:ELMARK

Number:95SHELLY18LED1  
 Date:2020-10-29 09:54:08  
 Humidity:65.0%  
 Remarks:7051